

# **MySQL Router 8.0**

---

## Abstract

MySQL Router is part of InnoDB cluster, and is lightweight middleware that provides transparent routing between your application and back-end MySQL Servers. It can be used for a wide variety of use cases, such as providing high availability and scalability by effectively routing database traffic to appropriate back-end MySQL Servers. The pluggable architecture also enables developers to extend MySQL Router for custom use cases. For additional details about how MySQL Router is part of InnoDB cluster, see [InnoDB Cluster](#).

MySQL Router 8.0 is highly recommended for use with MySQL Server 8.0 and 5.7.

For notes detailing the changes in each release, see the [MySQL Router Release Notes](#).

If you have not yet installed MySQL Router, download it from the [download site](#).

For help with using MySQL, please visit either the [MySQL Forums](#) or [MySQL Mailing Lists](#), where you can discuss your issues with other MySQL users.

**Licensing information.** This product may include third-party software, used under license. If you are using a *Commercial* release of MySQL Router, see [MySQL Router Commercial License Information User Manual](#) for licensing information, including licensing information relating to third-party software that may be included in this Commercial release. If you are using a *Community* release of MySQL Router, see [MySQL Router Community License Information User Manual](#) for licensing information, including licensing information relating to third-party software that may be included in this Community release.

Document generated on: 2019-03-21 (revision: 61340)

---

---

# Table of Contents

Preface and Legal Notices .....	v
1 General Information .....	1
1.1 Routing for MySQL InnoDB cluster .....	1
1.2 Cluster Metadata and State .....	3
1.3 Connection Routing .....	3
1.4 Application Considerations .....	4
1.5 What's New in MySQL Router 8.0 .....	5
2 Installing MySQL Router .....	7
2.1 Installing MySQL Router on Linux .....	7
2.2 Installing MySQL Router on macOS .....	9
2.3 Installing MySQL Router on Windows .....	9
2.4 Installing MySQL Router from Source Code .....	10
2.4.1 Prerequisites .....	11
2.4.2 Compiling the Source Code .....	11
2.4.3 Installing from Source Code .....	13
2.4.4 Testing the Installation .....	14
3 Deploying MySQL Router .....	17
3.1 Bootstrapping MySQL Router .....	18
3.2 Trying out MySQL Router in a Sandbox .....	20
3.3 Basic Connection Routing .....	23
4 Configuration .....	25
4.1 Configuration File Syntax .....	25
4.2 Configuration File Locations .....	27
4.3 Configuration Options .....	29
4.3.1 MySQL Router Command Line Programs .....	29
4.3.2 Configuration File Options .....	44
4.3.3 Configuration File Example .....	60
5 MySQL Router Application .....	63
5.1 Starting MySQL Router .....	63
5.2 Using the Logging Feature .....	64
A MySQL Router Frequently Asked Questions .....	67



---

# Preface and Legal Notices

This is the MySQL Router manual. This document covers MySQL Router.

**Licensing information.** This product may include third-party software, used under license. If you are using a *Commercial* release of MySQL Router, see [MySQL Router Commercial License Information User Manual](#) for licensing information, including licensing information relating to third-party software that may be included in this Commercial release. If you are using a *Community* release of MySQL Router, see [MySQL Router Community License Information User Manual](#) for licensing information, including licensing information relating to third-party software that may be included in this Community release.

## Legal Notices

Copyright © 2006, 2019, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to

your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is NOT distributed under a GPL license. Use of this documentation is subject to the following terms:

You may create a printed copy of this documentation solely for your own personal use. Conversion to other formats is allowed as long as the actual content is not altered or edited in any way. You shall not publish or distribute this documentation in any form or on any media, except if you distribute the documentation in a manner similar to how Oracle disseminates it (that is, electronically for download on a Web site with the software) or on a CD-ROM or similar medium, provided however that the documentation is disseminated together with the software on the same medium. Any other use, such as any dissemination of printed copies or use of this documentation, in whole or in part, in another publication, requires the prior written consent from an authorized representative of Oracle. Oracle and/or its affiliates reserve any and all rights to this documentation not expressly granted above.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

## Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

---

# Chapter 1 General Information

## Table of Contents

1.1 Routing for MySQL InnoDB cluster .....	1
1.2 Cluster Metadata and State .....	3
1.3 Connection Routing .....	3
1.4 Application Considerations .....	4
1.5 What's New in MySQL Router 8.0 .....	5

MySQL Router is a building block for high availability (HA) solutions. It simplifies application development by intelligently routing connections to MySQL servers for increased performance and reliability.

MySQL Router 8 fully supports MySQL 5.7 and MySQL 8, and it replaces the MySQL Router 2.x series. If you currently use Router 2.0 or 2.1 then we recommend upgrading your installation to MySQL Router 8.

## 1.1 Routing for MySQL InnoDB cluster

MySQL Router is part of InnoDB cluster and is lightweight middleware that provides transparent routing between your application and back-end MySQL Servers. It is used for a wide variety of use cases, such as providing high availability and scalability by routing database traffic to appropriate back-end MySQL servers. The pluggable architecture also enables developers to extend MySQL Router for custom use cases.

For additional details about how Router is part of InnoDB cluster, see [InnoDB Cluster](#).

### Introduction

For client applications to handle failover, they need to be aware of the InnoDB cluster topology and know which MySQL instance is the PRIMARY. While it is possible for applications to implement that logic, MySQL Router can provide and handle this functionality for you.

MySQL uses Group Replication to replicate databases across multiple servers while performing automatic failover in the event of a server failure. When used with a MySQL InnoDB cluster, MySQL Router acts as a proxy to hide the multiple MySQL instances on your network and map the data requests to one of the cluster instances. As long as there are enough online replicas and communication between the components is intact, applications will be able to contact one of them. MySQL Router also makes this possible by having applications connect to MySQL Router instead of directly to MySQL.

### Deploying Router with MySQL InnoDB cluster

The recommended deployment model for MySQL Router is with InnoDB cluster, with Router sitting on the same host as the application.

The steps for deploying MySQL Router with an InnoDB cluster after configuring the cluster are:

1. [Install](#) MySQL Router.
2. Bootstrap InnoDB cluster, and test.

Bootstrapping automatically configures MySQL Router for an existing InnoDB cluster by using `--bootstrap` and other command-line options. During bootstrap, Router connects to the cluster, fetches its metadata, and configures itself for use. Bootstrapping is optional.

For additional information, see [Chapter 3, Deploying MySQL Router](#).

### 3. Set up MySQL Router for automatic startup.

Configure your system to automatically start MySQL Router when the host is rebooted, a process similar to how the MySQL server is configured to start automatically. For additional details, see [Section 5.1, “Starting MySQL Router”](#).

For example, after creating a MySQL InnoDB cluster, you might configure MySQL Router using:

```
shell> mysqlrouter --bootstrap localhost:3310 --directory /opt/myrouter --user snoopy
```

This example bootstraps MySQL Router to an existing InnoDB cluster where:

- `localhost:3310` is a member of an InnoDB cluster, and either the PRIMARY or bootstrap will redirect to a PRIMARY in the cluster.
- Because the optional `--directory` bootstrap option was used, this example creates a self-contained installation with all generated directories and files at `/opt/myrouter/`. These files include `start.sh`, `stop.sh`, `log/`, and a fully functional MySQL Router configuration file named `mysqlrouter.conf`.
- Only the host's system user named `snoopy` will have access to `/opt/myrouter/*`.

See `--bootstrap` and related options for ways to modify the bootstrap configuration process. For example, passing in `--conf-use-sockets` enables Unix domain socket connections because only TCP/IP connections are enabled by default.

## Bootstrapping and `group_replication_single_primary_mode`

When bootstrapping, the available ports and sockets are affected by the `group_replication_single_primary_mode` MySQL Server configuration option.



### Note

This document refers to default bootstrapping behavior. Other MySQL Router configuration options may affect this behavior, and generated configuration values can be manually changed after bootstrapping.

- With `group_replication_single_primary_mode=ON` (the default): Both Read-Write (primary) and Read-Only (secondary) ports are configured.
- With `group_replication_single_primary_mode=OFF`: Only Read-Write (primary) ports are configured.

For example:

With `group_replication_single_primary_mode=ON`, all connections to ports 6446 and 64460 go to the single primary and all connections to ports 6447 and 64470 go to the secondaries using the round-robin mode schedule.

```
shell> mysqlrouter --bootstrap localhost:3310

Classic MySQL protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:6446
- Read/Only Connections: localhost:6447

X protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:64460
- Read/Only Connections: localhost:64470
```

With `group_replication_single_primary_mode=OFF`, all connections to ports 6446 and 64460 go to the primaries using the round-robin mode schedule.



```
shell> mysqlrouter --bootstrap localhost:3310

Classic MySQL protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:6446

X protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:64460
```

## 1.2 Cluster Metadata and State

MySQL Router works by sitting in between applications and MySQL servers. Applications connect to Router normally as if they were connecting to an ordinary MySQL server. Whenever an application connects to Router, Router chooses a suitable MySQL server from the pool of candidates that it knows about, and then connects to it. From that moment on, Router forwards all network traffic between the application and MySQL, including responses coming back from it.

MySQL Router keeps a cached list of the online MySQL servers, or the topology and state of the configured InnoDB cluster. Initially, the list is loaded from Router's configuration file when Router is started. This list was generated with InnoDB cluster servers when Router was bootstrapped using the `--bootstrap` option.

To keep the cache updated, the metadata cache component keeps an open connection to one of the InnoDB cluster servers that contains metadata. It does so by querying the metadata database and live state information from MySQL's performance schema. The cluster metadata is changed whenever the InnoDB cluster is modified, such as adding or removing a MySQL server using the MySQL Shell, and the performance\_schema tables are updated in real-time by the MySQL server's Group Replication plugin whenever a cluster state change is detected. For example, if one of the MySQL servers had an unexpected shutdown.

When Router detects that a connected MySQL server shuts down, for example because the metadata cache has lost its connection and can not connect again, it attempts to connect to a different MySQL server to fetch metadata and InnoDB cluster state from the new MySQL server.

Application connections to a MySQL server that shuts down are automatically closed. They must then reconnect to Router, which redirects them to an online MySQL server.

## 1.3 Connection Routing

Connection routing means redirecting MySQL connections to an available MySQL server. MySQL packets are routed in their entirety without inspection. For an example deployment using basic connection routing, see [Section 3.3, "Basic Connection Routing"](#).

Applications connect to MySQL Router and not directly to MySQL Server, and if the connection fails then applications are designed to retry the connection because MySQL Router selects a new MySQL server after failed attempts. This is also called simple redirect connection routing because it requires the application to retry the connection. That is, if a connection from MySQL Router to the MySQL server is interrupted, the application encounters a connection failure. However, a new connection attempt triggers Router to find and connect to another MySQL server.

Routed servers and routing strategies are defined in a configuration file. For example, the following section tells MySQL Router to listen for connections on port 7002 of the localhost, and then redirect those connections to a MySQL instance defined by the `destinations` option, including servers running on the localhost listening on ports 3306, 3307, and 3308. We also use the `routing_strategy` option to use the round robin form of load-balancing. For additional information, see [Section 4.3, "Configuration Options"](#)

```
[routing:simple_redirect]
bind_port = 7002
routing_strategy = round-robin
destinations = localhost:3306,localhost:3307,localhost:3308
```

This example section is titled `routing:simple_redirect`. The first part, `routing`, is the section name used internally to determine which plugin to load. The second part, `simple_redirect`, is an optional section key to differentiate between other routing strategies.

When a server is no longer reachable, MySQL Router moves to the next server destination in the list and circles back to the first server destination if the list is exhausted as per the round-robin strategy.

**Note**

Before MySQL Router 8.0, the now deprecated `mode` option was used instead of the `routing_strategy` option that was added in MySQL Router 8.0.

## 1.4 Application Considerations

MySQL Router usage does not require specific libraries or interfaces. Aside from managing the MySQL Router instance, write your application as if MySQL Router was a typical MySQL instance.

The only difference when using MySQL Router is how you make connections to the MySQL server. Applications using a single MySQL connection at startup that does not test for connection errors must be updated. This is because MySQL Router redirects connections when the connection is attempted and does not read packets or perform an analysis. If a MySQL server fails, Router returns the connection error to the application.

For these reasons, the application should be written to test for connection errors and, if encountered, retry the connection. If this technique or one similar is employed in your application then using MySQL Router will not require any extra effort.

The following gives a better sense of why you may want to use MySQL Router and looks into how it is used from an application's point of view.

### Scenarios

There are several possible scenarios for MySQL Router, including:

- As a developer, I want my application to connect to a service so it gets a connection to, by default, the current primary of a group replication cluster.
- As an administrator, I want to set up multiple services so MySQL Router listens on a different port for each highly available replica set.
- As an administrator, I want to be able to run a connection routing service on port 3306 so it is more transparent to a user or application.
- As an administrator, I want to configure a mode for each connection routing service so I can specify whether a primary or secondary is returned.

### Workflow with MySQL Router

The workflow for using MySQL Router is as follows:

1. MySQL Client or Connector connects to MySQL Router to, for example, port 6446.
2. Router checks for an available MySQL server.
3. Router opens a connection to a suitable MySQL server.
4. Router forwards packets back and forth, between the application and the MySQL server
5. Router disconnects the application if the connected MySQL server fails. The application can then retry connecting to Router, and Router then chooses a different and available MySQL server.

## Connections using MySQL Router

An application connects to MySQL Router, and Router connects the application to an available MySQL server.

This example demonstrates that a connection transparently connects to one of the InnoDB cluster instances. Because this example uses a sandboxed InnoDB cluster where all instances run on the same host, we check the `port` status variable to see which MySQL instance is connected.

Make a connection to MySQL Router using the MySQL client, for example:

```
shell> mysql -u root -h 127.0.0.1 -P 6446 -p
```

These port numbers depend on your configuration, but compare ports in this example:

```
mysql> select @@port;
+-----+
| @@port |
+-----+
| 3310   |
+-----+
1 row in set (0.00 sec)
```

To summarize, the client (application) connected to port 6446 but is connected to a MySQL instance on port 3310.

## Recommendations

The following are recommendations for using MySQL Router.

- Install and run MySQL Router on the same host as the application. For a list of reasons, see [Chapter 3, Deploying MySQL Router](#).
- Bind Router to localhost using `bind_port = 127.0.0.1:<port>` in the configuration file. Alternatively, on Linux, disable TCP connections (see `--conf-skip-tcp`) and limit this to only using Unix socket connections (see `--conf-use-sockets`).

## 1.5 What's New in MySQL Router 8.0

This section summarizes many of the new features added to MySQL Router 8.0, in relation to MySQL Router 2.1.

### Version Numbering

MySQL Router 8.0.3 is the first 8.0.x release to use the new numbering, and is the successor to MySQL Router 2.1.4.

MySQL Connectors and other MySQL client tools and applications now synchronize the first digit of their version number with the (highest) MySQL server version they support. This change makes it easy and intuitive to decide which client version to use for which server version. Similarly, MySQL Router now uses the same version number as MySQL Server.

### New Features and Changes

- The optional `routing_strategy` configuration option was added. The available values are `first-available`, `next-available`, `round-robin`, and `round-robin-with-fallback`.

Previously, these strategies were described as scheduling modes by the `mode` configuration option where the read-write mode defaults to the first-available strategy, and the read-only mode defaults to the round-robin strategy. This preserves previous behavior for these modes.

- The `--ssl-key` and `--ssl-cert` optional bootstrap command-line options were added. They directly use their MySQL client's counterparts, and specify the client-side certificate and private key to facilitate client-side authentication. This is useful when the root account used during bootstrap was created with REQUIRE X509, which requires the client to authenticate itself when logging in.
- The new `connect_timeout` and `read_timeout` metadata configuration file options were added. These are defined under the [DEFAULT] namespace and affect internal operations, such as metadata server connections.
- Bootstrap now accepts any member of an InnoDB cluster and automatically finds and reconnects to a writable primary. Before, only the primary was accepted.
- Bootstrap now accepts the `--config` option and reads the `[logger] level` option's definition.
- The maximum number of concurrent client connections was increased from about 500 to over 5000, a limit now dependent on the operation system. To achieve this, `select()` based fd event calls were replaced by `poll()` (or `WSAPoll()` on Windows).
- A new `mysqlrouter_plugin_info` utility was added to help debug MySQL Router plugins. It provides information such as the plugin version, description, ABI version, requirements, and function pointers.

## Additional Changes

For complete list of all changes introduced in MySQL Router 8.0, see the [MySQL Router 8.0 Release Notes](#)

---

# Chapter 2 Installing MySQL Router

## Table of Contents

2.1 Installing MySQL Router on Linux .....	7
2.2 Installing MySQL Router on macOS .....	9
2.3 Installing MySQL Router on Windows .....	9
2.4 Installing MySQL Router from Source Code .....	10
2.4.1 Prerequisites .....	11
2.4.2 Compiling the Source Code .....	11
2.4.3 Installing from Source Code .....	13
2.4.4 Testing the Installation .....	14

This chapter describes how to obtain and install MySQL Router. Downloads are available from the [download site](#).

## 2.1 Installing MySQL Router on Linux

There are binary distributions of MySQL Router available for several variants of Linux, including Fedora, Oracle Linux, Red Hat, and Ubuntu.

Installation options include:

- **Official MySQL Yum or APT repository packages:** These binaries are built by the MySQL Release team. For additional information about installing these, see the quick guides for installing them using [Yum](#) or [APT](#).
- **Download official MySQL packages:** Downloads are available at <https://dev.mysql.com/downloads/router>. Download and install using your preferred package manager.

Alternatively, MySQL Router is included in MySQL Server's source and monolithic binary packages as of MySQL Router 8.0.13.

- **Download the source code and compile yourself:** The source code is available at <https://dev.mysql.com/downloads/router> as a `tar.gz` or RPM package. Alternatively, the source code is also [available on GitHub](#).

For information about compiling MySQL Router, see [Installing MySQL Router from Source Code](#).

The procedure for installing on Linux depends on your Linux distribution.

Installing MySQL Router using an official DEB or RPM package creates a local system user and group named "mysqlrouter" on the host that MySQL Router runs as by default. For additional information, see the system `user`'s configuration option.

### Installing DEB packages

On Ubuntu, and other systems that use the Debian package scheme, you can either download and install `.deb` packages or use the APT package manager.

### Using the APT Package Manager

1. Install the MySQL APT repository as described in the [MySQL APT Repository](#) documentation. For example:



#### Note

Download the APT configuration package from [here](#).

```
shell> sudo dpkg -i mysql-apt-config_0.8.8-1_all.deb
```

Enable the "MySQL Tools & Connectors" on the configuration screen.

2. Update your APT repository:

```
shell> sudo apt-get update
```

3. Install MySQL Router. For example:

```
shell> sudo apt-get install mysql-router
```

### Manually Installing a Package

You can also download the .deb package and install it from the command line similarly to

```
shell> sudo dpkg -i package.deb
```

`package.deb` is the MySQL Router package name; for example, `mysql-router-version-lubul604-amd64.deb`, where `version` is the MySQL Router version number.

### Installing RPM packages

On RPM-based systems, you can either download and install RPM packages or use the Yum package manager.

### Using the Yum Package Manager

- First, install the MySQL Yum repository as described in the [MySQL Yum Repository](#) documentation. For example:



#### Note

Download the Yum configuration package from [here](#).

```
shell> sudo rpm -Uvh mysql57-community-release-el7-11.noarch.rpm
```

- Next, install MySQL Router. For example:

```
shell> sudo yum install mysql-router
```

### Manually Installing an RPM Package

```
shell> sudo rpm -i package.rpm
```

`package.rpm` is the MySQL Router package name; for example, `mysql-router-version-el7.x86_64.rpm`, where `version` is the MySQL Router version number.

### Uninstalling

The procedure for uninstalling MySQL Router on Linux depends on the package you are using.

### Uninstalling DEB packages

To uninstall a Debian package, use this command:

```
shell> sudo dpkg -r mysql-router
```

This command does not remove the configuration files. To also remove them and the data directory, use:

```
shell> sudo dpkg --purge mysql-router
```



#### Note

Alternatively, use `apt-get remove mysql-router` or `apt-get purge mysql-router`.

## Uninstalling RPM packages

To uninstall an RPM package, use this command:

```
shell> sudo rpm -e mysql-router
```



#### Note

Similarly, use `yum remove mysql-router`.

This command does not remove the configuration files.

## What Is Not Removed

When not purging, the uninstallation process does not remove your configuration files. On Debian systems, this might include files such as:

```
/etc/init.d/mysqlrouter  
/etc/mysqlrouter/mysqlrouter.conf  
/etc/apparmor.d/usr.sbin.mysqlrouter
```

## 2.2 Installing MySQL Router on macOS

Download the DMG archive from <https://dev.mysql.com/downloads/router/>, and execute it to install MySQL Router.

Alternatively, download, unpack, and manually install the compressed `.tar.gz` file.

## 2.3 Installing MySQL Router on Windows

MySQL Router for Windows can be installed using the MySQL Installer that installs and updates all MySQL products on Windows, or by downloading the ZIP Archive.

### Windows Prerequisites

*For the Community version of MySQL Router:* The Visual C++ Redistributable for Visual Studio 2015 (available at the [Microsoft Download Center](#)) is required. Install it before installing MySQL Router on Windows.

### Installing Using MySQL Installer

The general MySQL Installer download is available at <https://dev.mysql.com/downloads/windows/installer/>. The MySQL Installer application can install, upgrade, and manage most MySQL products, including MySQL Router. MySQL Installer also includes an option to bootstrap MySQL Router with a MySQL InnoDB cluster.

## Recommended Approach

Managing all of your MySQL products, including MySQL Router, with [MySQL Installer](#) is the recommended approach. It handles all requirements, prerequisites, configuration procedures, and upgrades.

When executing [MySQL Installer](#), you may choose MySQL Router as one of the products to install or upgrade.

MySQL Router is typically installed in `C:\%PROGRAMFILES%\MySQL\MySQL Router 8.0`, where `%PROGRAMFILES%` is the default directory for programs for your locale. The `%PROGRAMFILES%` directory is defined as `C:\Program Files\` on most systems.

For information about installing and starting Router as a Windows service, see [Section 5.1, "Starting MySQL Router"](#).

## Installing the ZIP Archive

The ZIP Archive download is available at <https://dev.mysql.com/downloads/router/>.

Unlike installing with MySQL Installer, unpacking the MySQL Router ZIP archive does not check for dependencies on your system, such as the required VC++ 2015 runtime. When installing MySQL Router using the ZIP archive, download and install [Visual C++ Redistributable for Visual Studio 2015](#) before using MySQL Router.

After installing the prerequisites, unzip the ZIP Archive and execute `bin/mysqlrouter.exe` as you normally would.

For information about installing and using MySQL Router as a Windows service, see [Section 5.1, "Starting MySQL Router"](#).

## 2.4 Installing MySQL Router from Source Code

The MySQL Router is written using the C++11 standard. As such, you must compile the code before you can install it. Compilation is typical of most C++ applications, as demonstrated below.

The CMake program provides control over how you configure a MySQL Router source distribution. Typically, you do this using options on the CMake command line. For information about options supported by CMake, run either of these commands in the top-level MySQL Router source directory:

```
shell> cmake . -LH
shell> ccmake .
```

The default CMake installation prefixes are used. It is different for each platform, but for most Unix-like platforms it is `"/usr/local"`. It is possible to alter the installation path with the CMake variable `"CMAKE_INSTALL_PREFIX"`. For example:

```
shell> mkdir build && cd build
shell> cmake .. -DINSTALL_LAYOUT=STANDALONE -DCMAKE_INSTALL_PREFIX=/opt/mysql/router8.0
```

Notice we use the `-DINSTALL_LAYOUT=STANDALONE` option to use the same installation layout as used for `.tar.gz` and `.zip` packages. This is the recommended setting for building the source.



### Note

The CMake options are not documented here, but they are similar to the MySQL Server CMake options. For additional (related) information, see [MySQL Source-Configuration Options](#).

Download and unpack the source files, and then follow the steps specific to your platform.



## Linux and macOS

```
shell> tar xzf mysql-router-8.0.14-src.tar.gz
shell> cd mysql-router-8.0.14-src
```

Once this is complete, you need to configure and compile MySQL Router using cmake. Our examples use the default installation location of `/usr/local`.



### Note

Installing MySQL Router generates a file named `install_manifest.txt` that lists all files (with paths) installed on the system. This file is useful for uninstalling MySQL Router.

However, there are [prerequisites](#) for compiling the MySQL Router source code.

### 2.4.1 Prerequisites

The following components and libraries are required to compile MySQL Router on Linux:

- An operating system with a compiler that supports **C++11**.

Example systems that include this support are Ubuntu 14.04 and later, Oracle Linux 7, and macOS 10.10 and later.



### Note

Enterprise Linux 6: compilation works but requires the Software Collection Library 1.2. For Oracle Linux, see [Docs](#) and [Downloads](#). For RedHat and CentOS, see [Docs](#) and [Downloads](#).

- MySQL Server 5.5 or higher client libraries and header files. For example, on Ubuntu this is the `libmysqlclient-dev` package.
- Code development tools including gcc, make, and assorted utilities for C++ 11 including GCC 4.8 and later, glibc 2.17 and later, and clang 3.3 and later
- SLES 12 considerations: as of MySQL 8.0.13, these binaries are built using GCC 7; and the lowest supported GCC version on this platform is now 5.3. This change means the GCC Devel repository is required. For example:

```
shell> cd /etc/zypp/repos.d/
shell> wget https://download.opensuse.org/repositories/devel:/gcc/SLE-12/devel:gcc.repo
```

- CMake 2.8.9 or later.
- Protobuf 3.0



### Note

If your MySQL Server installation does not include the header files and compiled client libraries, then you may need to download the MySQL Server source code.

### 2.4.2 Compiling the Source Code

To compile the source code, you should create a folder to contain the compiled binaries and executables, run cmake to create the make file, then compile the code. The following demonstrates the steps needed on a Ubuntu machine. Other platforms are similar.



**Note**

For some platforms, such as Oracle Enterprise Linux 6, you may also need to install the `devtoolset` software collection.

If you get an error stating that the MySQL libraries cannot be found, then check the listed paths. If the client libraries or the `include` folder does not exist, you may need to reference a compiled copy of the MySQL Server source code by using the `-DWITH_MYSQL=<path to server code>` option. More specifically, the compiler needs to be able to find the MySQL client libraries and include files. If `libmysqlclient` is stored elsewhere, then `-DMySQL_CLIENT_LIB=/path/to/libmysqlclient.so` can also be used. A compiled server source code tree will have these files. So too will most installations of the MySQL server.

For example, on Debian and RPM-based platforms, you would need the packages which contain the libraries and the development (include) files. If you installed MySQL from a platform-specific repository, you would need to install the `mysql-community-libs` and `mysql-community-devel` packages.



**Note**

If you change anything and need to recompile from scratch, be sure to delete the `CMakeCache.txt` file before running the `cmake` command.

Begin by running the `cmake` command to create the makefile. The following commands are run from the root of the MySQL Router source code tree. You should see similar results with the appropriate paths for your system.

```
shell> mkdir build
shell> cd build
shell> cmake .. -DWITH_MYSQL=<path to binaries and libraries>
-- The C compiler identification is GNU 4.9.2
-- The CXX compiler identification is GNU 4.9.2
-- Check for working C compiler: /usr/bin/cc
-- Check for working C compiler: /usr/bin/cc -- works
-- Detecting C compiler ABI info
-- Detecting C compiler ABI info - done
-- Check for working CXX compiler: /usr/bin/c++
-- Check for working CXX compiler: /usr/bin/c++ -- works
-- Detecting CXX compiler ABI info
-- Detecting CXX compiler ABI info - done
-- Loading internal repository
-- Installation layout set to DEFAULT
-- Adding MySQL Harness from /home/cbell/source/git/mysql-router-2.0.2/mysql_harness
-- Harness will install plugins in lib/mysqlrouter
-- MySQL Harness CPU Descriptor is x86_64
-- MySQL Harness OS Descriptor is linux
-- MySQL Harness Compiler Descriptor is gnu-3
-- MySQL Harness Runtime Descriptor is *
-- Found Doxygen: /usr/bin/doxygen (found version "1.8.9.1")
-- Performing Test COMPILER_SUPPORTS_CXX11
-- Performing Test COMPILER_SUPPORTS_CXX11 - Success
-- Performing Test COMPILER_SUPPORTS_CXX0X
-- Performing Test COMPILER_SUPPORTS_CXX0X - Success
-- Looking for include file pthread.h
-- Looking for include file pthread.h - found
-- Looking for pthread_create
-- Looking for pthread_create - not found
-- Looking for pthread_create in pthreads
-- Looking for pthread_create in pthreads - not found
-- Looking for pthread_create in pthread
-- Looking for pthread_create in pthread - found
-- Found Threads: TRUE
-- Performing Test support_11
-- Performing Test support_11 - Success
-- Performing Test support_0x
-- Performing Test support_0x - Success
-- Found MySQL Libraries 5.6.27; using <path to server code>/lib/libmysqlclient.so
```

```
-- Loading module 'router'
-- Loading module 'routing'
-- Configuring done
-- Generating done
-- Build files have been written to: <path to router code>/build
```

Next, compile the code. For this we only need the `make` command as shown. Again, you should see similar results on your system.

```
shell> make
Scanning dependencies of target harness-archive
[ 2%] Building CXX object harness/harness/CMakeFiles/harness-archive.dir/src/loader.cc.o
[ 5%] Building CXX object harness/harness/CMakeFiles/harness-archive.dir/src/utilities.cc.o
[ 8%] Building CXX object harness/harness/CMakeFiles/harness-archive.dir/src/config_parser.cc.o
[ 11%] Building CXX object harness/harness/CMakeFiles/harness-archive.dir/src/designator.cc.o
[ 14%] Building CXX object harness/harness/CMakeFiles/harness-archive.dir/src/filesystem-posix.cc.o
Linking CXX static library libmysqlharness.a
[ 14%] Built target harness-archive
Scanning dependencies of target harness-library
[ 17%] Building CXX object harness/harness/CMakeFiles/harness-library.dir/src/loader.cc.o
[ 20%] Building CXX object harness/harness/CMakeFiles/harness-library.dir/src/utilities.cc.o
[ 22%] Building CXX object harness/harness/CMakeFiles/harness-library.dir/src/config_parser.cc.o
[ 25%] Building CXX object harness/harness/CMakeFiles/harness-library.dir/src/designator.cc.o
[ 28%] Building CXX object harness/harness/CMakeFiles/harness-library.dir/src/filesystem-posix.cc.o
Linking CXX shared library libmysqlharness.so
[ 28%] Built target harness-library
Scanning dependencies of target logger
[ 31%] Building CXX object harness/plugins/logger/CMakeFiles/logger.dir/logger.cc.o
Linking CXX shared library ../../../../stage/lib/mysqlrouter/logger.so
[ 31%] Built target logger
Scanning dependencies of target keepalive
[ 34%] Building CXX object harness/plugins/keepalive/CMakeFiles/keepalive.dir/src/keepalive.cc.o
Linking CXX shared library ../../../../stage/lib/mysqlrouter/keepalive.so
[ 34%] Built target keepalive
Scanning dependencies of target router_lib
[ 37%] Building CXX object src/router/src/CMakeFiles/router_lib.dir/router_app.cc.o
[ 40%] Building CXX object src/router/src/CMakeFiles/router_lib.dir/arg_handler.cc.o
[ 42%] Building CXX object src/router/src/CMakeFiles/router_lib.dir/utils.cc.o
[ 45%] Building CXX object src/router/src/CMakeFiles/router_lib.dir/datatypes.cc.o
[ 48%] Building CXX object src/router/src/CMakeFiles/router_lib.dir/plugin_config.cc.o
Linking CXX shared library ../../../../stage/lib/libmysqlrouter.so
[ 48%] Built target router_lib
Scanning dependencies of target mysqlrouter
[ 51%] Building CXX object src/router/src/CMakeFiles/mysqlrouter.dir/main.cc.o
Linking CXX executable ../../../../stage/bin/mysqlrouter
[ 51%] Built target mysqlrouter
Scanning dependencies of target routing
[ 77%] Building CXX object src/routing/CMakeFiles/routing.dir/src/routing_plugin.cc.o
[ 80%] Building CXX object src/routing/CMakeFiles/routing.dir/src/plugin_config.cc.o
[ 82%] Building CXX object src/routing/CMakeFiles/routing.dir/src/mysql_routing.cc.o
[ 85%] Building CXX object src/routing/CMakeFiles/routing.dir/src/utils.cc.o
[ 88%] Building CXX object src/routing/CMakeFiles/routing.dir/src/destination.cc.o
[ 94%] Building CXX object src/routing/CMakeFiles/routing.dir/src/dest_first_available.cc.o
[ 97%] Building CXX object src/routing/CMakeFiles/routing.dir/src/uri.cc.o
[100%] Building CXX object src/routing/CMakeFiles/routing.dir/src/routing.cc.o
Linking CXX shared library ../../../../stage/lib/mysqlrouter/routing.so
[100%] Built target routing
```

### 2.4.3 Installing from Source Code

Once the source code is compiled, you can install the MySQL Router on your system with the following command. Note that you may need elevated privileges (e.g. `sudo`) to install.

```
shell> sudo make install
[ 14%] Built target harness-archive
[ 28%] Built target harness-library
[ 31%] Built target logger
[ 34%] Built target keepalive
[ 48%] Built target router_lib
```

```

[ 51%] Built target mysqlrouter
[100%] Built target routing
Install the project...
-- Install configuration: ""
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/loader.h
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/filesystem.h
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/plugin.h
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/config_parser.h
-- Installing: /usr/local/lib/libmysqlharness.a
-- Installing: /usr/local/lib/libmysqlharness.so.0
-- Up-to-date: /usr/local/lib/libmysqlharness.so
-- Set runtime path of "/usr/local/lib/libmysqlharness.so.0" to "$ORIGIN/../lib"
-- Installing: /usr/local/lib/mysqlrouter/keepalive.so
-- Set runtime path of "/usr/local/lib/mysqlrouter/keepalive.so" to "$ORIGIN"
-- Installing: /usr/local/lib/mysqlrouter/logger.so
-- Set runtime path of "/usr/local/lib/mysqlrouter/logger.so" to "$ORIGIN"
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/logger.h
-- Up-to-date: /usr/local/share/doc/mysqlrouter/README.txt
-- Up-to-date: /usr/local/share/doc/mysqlrouter/License.txt
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/plugin_config.h
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/utils.h
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/datatypes.h
-- Installing: //var
-- Installing: //var/local
-- Installing: //var/local/mysqlrouter
-- Installing: //var/local/mysqlrouter/log
-- Installing: //var
-- Installing: //var/local
-- Installing: //var/local/mysqlrouter
-- Installing: //var/local/mysqlrouter/run
-- Installing: /usr/local/etc
-- Installing: /usr/local/etc/mysqlrouter
-- Installing: /usr/local/bin/mysqlrouter
-- Set runtime path of "/usr/local/bin/mysqlrouter" to "$ORIGIN/../lib"
-- Installing: /usr/local/lib/libmysqlrouter.so.1
-- Up-to-date: /usr/local/lib/libmysqlrouter.so
-- Set runtime path of "/usr/local/lib/libmysqlrouter.so.1" to "$ORIGIN/../lib"
-- Installing: /usr/local/lib/mysqlrouter/routing.so
-- Set runtime path of "/usr/local/lib/mysqlrouter/routing.so" to "$ORIGIN"
-- Up-to-date: /usr/local/include/mysql/mysqlrouter/routing.h

```

## 2.4.4 Testing the Installation

You can ensure the installation succeeded by running the following command. You should see a similar output on your system. An example of setting the Router for simple routing is available at [Section 3.2, “Trying out MySQL Router in a Sandbox”](#)



### Note

Our example assumes that `mysqlrouter` is in the system's PATH. In this case, PATH includes `/usr/local/bin`.

```

shell> mysqlrouter --help

MySQL Router v8.0.14 on Linux (64-bit) (GPL community edition)
Copyright (c) 2015, 2017, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Start MySQL Router.

Configuration read from the following files in the given order (enclosed
in parentheses means not available for reading):
  (/etc/mysqlrouter/mysqlrouter.conf)
  /home/philip/.mysqlrouter.conf
...

```



**Note**

Use the `mysqlrouter --version` command to check the version.



# Chapter 3 Deploying MySQL Router

## Table of Contents

3.1 Bootstrapping MySQL Router .....	18
3.2 Trying out MySQL Router in a Sandbox .....	20
3.3 Basic Connection Routing .....	23

## Performance Recommendations

For best performance, MySQL Router is typically installed on the same host as the application that uses it. Possible reasons include:

- To allow local UNIX domain socket connections to the application, instead of TCP/IP.




### Note

Unix domain sockets can function with applications connecting to MySQL Router, but not for MySQL Router connecting to a MySQL Server.

- To decrease network latency.
- To allow MySQL Router to connect to MySQL without requiring extra accounts for the Router's host, for MySQL accounts that are created specifically for application hosts such as *myapp@198.51.100.45* instead of a value like *myapp@%*.
- Typically application servers are easiest to scale.

You can run multiple MySQL Router instances on your network, and you do not need to isolate MySQL Router to a single machine. This is because MySQL Router has no affinity for any particular server or host.

Figure 3.1 Example MySQL Router Deployment

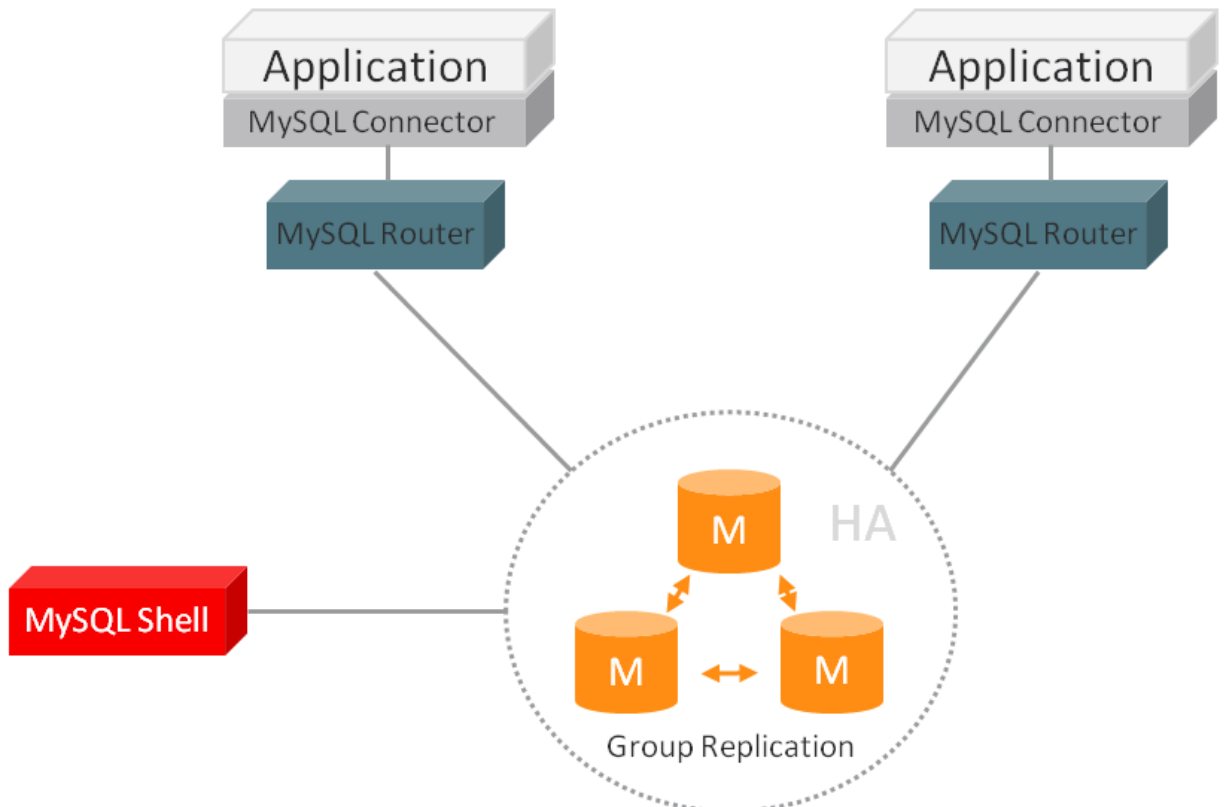

## 3.1 Bootstrapping MySQL Router

Here is a brief example to demonstrate how MySQL Router can be deployed using bootstrapping. For additional information, see `--bootstrap` and the other [bootstrap options](#).

This example creates a standalone MySQL Router instance using the `--directory` option, enables sockets, and assumes that an InnoDB cluster named `myCluster` already exists:

```
shell> mysqlrouter --bootstrap root@localhost:3310 --directory /tmp/myrouter --conf-use-sockets

Please enter MySQL password for root:

Bootstrapping MySQL Router instance at '/tmp/myrouter'...
MySQL Router has now been configured for the InnoDB cluster 'myCluster'.

The following connection information can be used to connect to the cluster.

Classic MySQL protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:6446
- Read/Write Connections: /tmp/myrouter/mysql.sock
- Read/Only Connections: localhost:6447
- Read/Only Connections: /tmp/myrouter/mysqlro.sock

X protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:64460
- Read/Write Connections: /tmp/myrouter/mysqlx.sock
- Read/Only Connections: localhost:64470
- Read/Only Connections: /tmp/myrouter/mysqlxro.sock

shell> cd /tmp/myrouter
shell> ./start.sh
```

A generated MySQL Router directory looks similar to:

```
shell> ls -l | awk '{print $9}'

data
log
mysqlro.sock
mysqlrouter.conf
mysqlrouter.key
mysqlrouter.pid
mysql.sock
mysqlxro.sock
mysqlx.sock
run
start.sh
stop.sh
```

A generated MySQL Router configuration file (`mysqlrouter.conf`) looks similar to:

```
# File automatically generated during MySQL Router bootstrap
[DEFAULT]
logging_folder=/tmp/myrouter/log
runtime_folder=/tmp/myrouter/run
data_folder=/tmp/myrouter/data
keyring_path=/tmp/myrouter/data/keyring
master_key_path=/tmp/myrouter/mysqlrouter.key
connect_timeout=15
read_timeout=30
dynamic_state=/tmp/myrouter/data/state.json

[logger]
level = INFO

[metadata_cache:myCluster]
```



```

router_id=5
user=mysql_router5_p79mg6q6ytrw
metadata_cluster=myCluster
ttl=0.5

[routing:myCluster_default_rw]
bind_address=0.0.0.0
bind_port=6446
socket=/tmp/myrouter/mysql.sock
destinations=metadata-cache://myCluster/default?role=PRIMARY
routing_strategy=round-robin
protocol=classic

[routing:myCluster_default_ro]
bind_address=0.0.0.0
bind_port=6447
socket=/tmp/myrouter/mysqlro.sock
destinations=metadata-cache://myCluster/default?role=SECONDARY
routing_strategy=round-robin
protocol=classic

[routing:myCluster_default_x_rw]
bind_address=0.0.0.0
bind_port=64460
socket=/tmp/myrouter/mysqlx.sock
destinations=metadata-cache://myCluster/default?role=PRIMARY
routing_strategy=round-robin
protocol=x

[routing:myCluster_default_x_ro]
bind_address=0.0.0.0
bind_port=64470
socket=/tmp/myrouter/mysqlxro.sock
destinations=metadata-cache://myCluster/default?role=SECONDARY
routing_strategy=round-robin
protocol=x

```

In this example, MySQL Router configured four ports and four sockets. Ports are added by default, and sockets were added by passing in `--conf-use-sockets`. The related command line options:

- `--conf-use-sockets`: Optionally enable UNIX domain sockets for all four connection types, as demonstrated in the example.
- `--conf-skip-tcp`: Optionally disable TCP ports, an option to pass in with `--conf-use-sockets` if you only want sockets.
- `--conf-base-port`: Optionally change the range of ports rather than using the default ports. This sets the port for classic read-write (PRIMARY) connections, and defaults to `6446`.
- `--conf-bind-address`: Optionally change the `bind_address` value for each route.

To demonstrate MySQL Router's behavior, the following client (application) connects to port 6446 but is connected to a MySQL instance on port 3310.

```

shell> mysql -u root -h 127.0.0.1 -P 6446 -p
...
mysql> select @@port;
+-----+
| @@port |
+-----+
| 3310   |
+-----+
1 row in set (0.00 sec)

```

For additional examples, see [Set Up a MySQL Server Sandbox](#) and [Sandbox Deployment of InnoDB Cluster](#).

## 3.2 Trying out MySQL Router in a Sandbox

Test a MySQL Router installation by setting up a Router sandbox with InnoDB cluster. In this case, Router acts as an intermediate node redirecting client connections to a list of servers. If one server fails, clients are redirected to the next available server in the list.

### Set Up a MySQL Server Sandbox

Begin by starting three MySQL Servers. You can do this in a variety of ways, including:

- Using the MySQL Shell AdminAPI interface that InnoDB cluster provides. This is the recommended and simplest approach, and is documented in this section. For additional information, see [InnoDB Cluster](#).

For a scripted approach, see either [Scripting AdminAPI](#) or <https://github.com/mattlord/Docker-InnoDB-Cluster>.

- By installing three MySQL Server instances on three different hosts, or on the same host.
- Using the `mysql-test-run.pl` script that is part of the MySQL Test Suite framework. For additional information, see [The MySQL Test Suite](#).
- Using the `mysqlcloneserver` MySQL Utility.

The following example uses the AdminAPI method to set up our cluster sandbox. This is a brief overview, so see [Sandbox Deployment of InnoDB Cluster](#) in the InnoDB cluster manual for additional details. The following assumes you have a current version of MySQL Shell, MySQL Server, and MySQL Router installed.

### Deploy a Sandbox cluster

This example uses MySQL Shell AdminAPI to set up a InnoDB cluster with three MySQL instances (one primary and two secondaries), and a bootstrapped standalone MySQL Router with a generate configuration file. Output was shortened using "...".

```
shell> mysqlsh

mysql-js> dba.deploySandboxInstance(3310)
...
mysql-js> dba.deploySandboxInstance(3320)
...
mysql-js> dba.deploySandboxInstance(3330)
...

mysql-js> \connect root@localhost:3310
...

mysql-js> cluster = dba.createCluster("myCluster")
...

mysql-js> cluster.addInstance("root@localhost:3320")
...
mysql-js> cluster.addInstance("root@localhost:3330")
...

mysql-js> cluster.status()
{
  "clusterName": "myCluster",
  "defaultReplicaSet": {
    "name": "default",
    "primary": "localhost:3310",
    "ssl": "REQUIRED",
    "status": "OK",
    "statusText": "Cluster is ONLINE and can tolerate up to ONE failure.",
```

```
"topology": {
  "localhost:3310": {
    "address": "localhost:3310",
    "mode": "R/W",
    "readReplicas": {},
    "role": "HA",
    "status": "ONLINE"
  },
  "localhost:3320": {
    "address": "localhost:3320",
    "mode": "R/O",
    "readReplicas": {},
    "role": "HA",
    "status": "ONLINE"
  },
  "localhost:3330": {
    "address": "localhost:3330",
    "mode": "R/O",
    "readReplicas": {},
    "role": "HA",
    "status": "ONLINE"
  }
},
"groupInformationSourceMember": "mysql://root@localhost:3310"
}

mysql-js> \q
Bye!
```

## Set Up the Router

Next, set up MySQL Router to redirect to these MySQL instances. We'll use bootstrapping (using `--bootstrap`), and create a self-contained MySQL Router installation using `--directory`. This uses the metadata cache plugin to securely store the credentials.

```
shell> mysqlrouter --bootstrap root@localhost:3310 --directory /tmp/myrouter

Please enter MySQL password for root:

Bootstrapping MySQL Router instance at '/tmp/mysqlrouter'...
MySQL Router has now been configured for the InnoDB cluster 'myCluster'.

The following connection information can be used to connect to the cluster.

Classic MySQL protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:6446
- Read/Only Connections: localhost:6447

X protocol connections to cluster 'myCluster':
- Read/Write Connections: localhost:64460
- Read/Only Connections: localhost:64470

shell> cd /tmp/myrouter

shell> ./start.sh
```

MySQL Router is now configured and running, and is using the **myCluster** cluster that we set up earlier.

## Testing the Router

Now connect to MySQL Router as you would any other MySQL Server by connecting to a configured MySQL Router port.

The following example connects to MySQL Router on port 6446, the port we configured for read-write connections:

```

shell> mysql -u root -h 127.0.0.1 -P 6446 -p
mysql> SELECT @@port;

+-----+
| @@port |
+-----+
| 3310   |
+-----+

```

As demonstrated, we connected to MySQL Router using port 6446 but see we are connected to our MySQL instance on port 3310 (our PRIMARY). Next let's connect to a read-only MySQL instance:

```

shell> mysql -u root -h 127.0.0.1 -P 6447 -p
mysql> SELECT @@port;

+-----+
| @@port |
+-----+
| 3320   |
+-----+

```

As demonstrated, we connected to MySQL Router using port 6447 but see we are connected to our MySQL instance on port 3320 (one of our secondaries). The read-only mode defaults to the round-robin strategy where the next connection refers to a different secondary:

```

shell> mysql -u root -h 127.0.0.1 -P 6447 -p
mysql> SELECT @@port;

+-----+
| @@port |
+-----+
| 3330   |
+-----+

```

As demonstrated, our second read-only connection to port 6447 connected to a different MySQL secondary, in this case to port 3330 instead of 3320.

Now test failover by first killing the primary MySQL instance (port 3310) that we connected to above.

```

shell> mysqlsh --uri root@127.0.0.1:6446
mysql-js> dba.killSandboxInstance(3310)

The MySQL sandbox instance on this host in
/home/philip/mysql-sandboxes/3310 will be killed

Killing MySQL instance...

Instance localhost:3310 successfully killed.

```

You can continue using MySQL Shell to check the connection but let us use the same `mysql` client example we did above:

```

shell> mysql -u root -h 127.0.0.1 -P 6446 -p
mysql> SELECT @@port;

+-----+
| @@port |
+-----+
| 3320   |
+-----+

shell> mysql -u root -h 127.0.0.1 -P 6447 -p
mysql> SELECT @@port;

```

```
+-----+
|  @@port  |
+-----+
|   3330   |
+-----+
```

As shown, despite connecting to the same ports (6446 for the primary and 6447 for a secondary), the underlying ports changed. Our new primary server changed from port 3310 to 3320 while our secondary changed from 3320 to 3330.

We have now demonstrated MySQL Router performing simple redirects to a list of primary and secondary MySQL instances.

### 3.3 Basic Connection Routing

The *Connection Routing* plugin performs connection-based routing, meaning it forwards packets to the server without inspecting them. This is a simplistic approach that provides high throughput. For additional general information about connection routing, see [Section 1.3, “Connection Routing”](#).

A simple connection-based routing setup is shown below. These and additional options are documented under [Section 4.3.2, “Configuration File Options”](#).

```
[logger]
level = INFO

[routing:secondary]
bind_address = localhost
bind_port = 7001
destinations = foo.example.org:3306,bar.example.org:3306,baz.example.org:3306
routing_strategy = round-robin

[routing:primary]
bind_address = localhost
bind_port = 7002
destinations = foo.example.org:3306,bar.example.org:3306
routing_strategy = first-available
```

Here we use connection routing to round-robin MySQL connections to three MySQL servers on port 7001 as defined by *round-robin* `routing_strategy`. This example also configures the *first-available* strategy for two of the servers using port 7002. The first-available strategy uses the first available server from the destinations list. The number of MySQL instances assigned to each `destinations` is up to you as this is only an example. Router does not inspect the packets and does not restrict connections based on assigned strategy or mode, so it is up to the application to determine where to send read and write requests, which is either port 7001 or 7002 in our example.



#### Note

Before MySQL Router 8.0, the now deprecated `mode` option was used instead of the `routing_strategy` option that was added in MySQL Router 8.0.

Assuming all three MySQL instances are running, next start MySQL Router by passing in the configuration file:

```
shell> ./bin/mysqlrouter -config=/etc/mysqlrouter-config.conf
```

Now MySQL Router is listening to port's 7001 and 7002 and sends requests to the appropriate MySQL instances. For example:

```
shell> ./bin/mysql --user=root --port 7001 --protocol=TCP
```

That will first connect to `foo.example.org`, and then `bar.example.org` next, then `baz.example.org`, and the fourth call goes back to `foo.example.org`. Instead, we configured port 7002 behavior differently:

```
shell> ./bin/mysql --user=root --port 7002 --protocol=TCP
```

That first connects to `foo.example.org`, and additional requests will continue connecting to `foo.example.org` until there is a failure, at which point `bar.example.org` is now used. For additional information about this behavior, see [mode](#).

---

# Chapter 4 Configuration

## Table of Contents

4.1 Configuration File Syntax .....	25
4.2 Configuration File Locations .....	27
4.3 Configuration Options .....	29
4.3.1 MySQL Router Command Line Programs .....	29
4.3.2 Configuration File Options .....	44
4.3.3 Configuration File Example .....	60

MySQL Router is configured using a required configuration file, additional optional configuration files, and some options are also available from the command line.

Bootstrapping is the preferred and common approach to generating a MySQL Router configuration file. For additional information, see `--bootstrap`. Bootstrapping generates a fully functional `mysqlrouter.conf` file.

## 4.1 Configuration File Syntax

The configuration file format resembles the traditional INI file format with sections and options, but with a few additional extensions.



### Note

Both forward slashes and backslashes are supported. Backslashes are unconditionally copied, as they do not escape characters.

## Comments

The configuration file can contain comment lines. Comment lines start with a hash (`#`) or semicolon (`;`) and continue to the end of the line. Trailing comments are *not* supported.

## Sections

Each configuration file consists of a list of *configuration sections* where each section contains a sequence of *configuration options*. Each configuration option has a name and value. For example:

```
[section name]
option = value
option = value
option = value

[section name:optional section key]

option = value
option = value
option = value
```

A configuration file section header starts with an opening bracket (`[`) and ends with a closing bracket (`]`). There can be leading and trailing space characters on the line, which are ignored, but no space inside the section brackets.

The section header inside the brackets consists of a *section name* and an optional *section key* that is separated from the section header with a colon (`:`). The combination of section name and section key is unique for a configuration.

The section names and section keys consist of a sequence of one or more letters, digits, or underscores (`_`). No other characters are allowed in the section name or section key.

A section is similar to a namespace. For example, the `user` option's meaning depends on its associated section. A `user` in the `[DEFAULT]` section refers to the system user that MySQL Router is run as, which is also controlled by the `--user` command line option. Unrelated to that is defining `user` in the `[metadata_cache]` section, which refers to the MySQL user that accesses a MySQL server's metadata.

## Default Section

The special section name `DEFAULT` (any case) is used for default values for options. Options not found in a section are looked up in the default section. The default section does not accept a section key.

## Options

After a section's start header, there can be a sequence of zero or more *option lines* where each option line is of the form:

```
name = value
```

Any leading or trailing blank characters on the option name or option value are removed before being handled. Option names are case-insensitive. Trailing comments are not supported, so in this example the option `mode` is given the value "read-only # Read only mode" and will therefore generate an error when starting the router.

```
[routing:round-robin]
# Trailing comments are not supported so the following is incorrect
routing_strategy=round-robin # Circles back to first server
```

## Variable Interpolation

Option values support (*variable interpolation*) using an option name given within braces `{` and `}`. Interpolation is done on retrieval of the option value and not when it is read from the configuration file. If a variable is not defined then no substitutions are done and the option value is read literally.

Consider this sample configuration file:

```
[DEFAULT]
prefix = /usr/

[sample]
bin = {prefix}bin/{name}
lib = {prefix}lib/{name}
name = magic
directory = C:\foo\bar\{3a339172-6898-11e6-8540-9f7b235afb23}
```

Here the value of `bin` is `"/usr/bin/magic"`, the value of `lib` is `"/usr/lib/magic"`, and the value of `directory` is `"C:\foo\bar\{3a339172-6898-11e6-8540-9f7b235afb23}"` because a variable named `"{3a339172-6898-11e6-8540-9f7b235afb23}"` is not defined.

## Predefined variables

MySQL Router defines predefined variables that are available to the configuration file. Variables use braces, such as `{program}` for the `program` predefined variable.

**Table 4.1 Predefined variables**

Name	Description
<code>program</code>	Name of the program, normally <code>mysqlrouter</code>
<code>origin</code>	Path to directory where binary is located
<code>logging_folder</code>	Path to folder for log files
<code>plugin_folder</code>	Path to folder for plugins



Name	Description
<code>runtime_folder</code>	Path to folder for runtime data
<code>config_folder</code>	Path to folder for configuration files

## 4.2 Configuration File Locations

MySQL Router scans for the default configuration files at startup, and optionally loads user-defined configuration files at runtime from the command line.

### Default Configuration File Locations

By default, MySQL Router scans specific locations for its configuration files that depend on the platform and how MySQL Router was set up.

You can alter the default locations at compile time by using the `-DROUTER_CONFIGDIR=<path>` option. You could also edit `cmake/settings.cmake` to change the default locations before compiling MySQL Router, thus adding new locations or exceptions for specific platforms.

Execute `mysqlrouter --help` to see the default configuration file locations (and their availability) on your system. For example:

```
shell> mysqlrouter --help

MySQL Router v8.0.14 on macOS v10.12 (64-bit) (GPL community edition)
Copyright (c) 2015, 2017, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Start MySQL Router.

Configuration read from the following files in the given order (enclosed
in parentheses means not available for reading):
  (/usr/local/mysql-router/mysqlrouter.conf)
  /Users/philip/.mysqlrouter.conf
Plugins Path:
  /usr/local/lib/mysqlrouter
Default Log Directory:
  /usr/local/mysql-router
Default Persistent Data Directory:
  /usr/local/mysql-router/data
Default Runtime State Directory:
  /usr/local/mysql-router/run

Usage: mysqlrouter [-v|--version] [-h|--help]
...

```



#### Important

The default configuration file is not loaded if a user-defined configuration file is passed in with the `--config` option.

On Linux, MySQL Router scans the following locations by default, although these locations are system dependent:

1. `/etc/mysqlrouter/mysqlrouter.conf`



#### Note

Unlike MySQL server, the backward compatible path `"/etc/mysqlrouter.conf"` is not supported.

2. `$HOME/.mysqlrouter.conf`**Note**

For backward compatibility, MySQL Router also looks for the `.ini` variant in each directory. In doing so, Router looks in the initial directory for the `.conf` version, then checks for a `.ini` version, and then repeats the process in the next directory which is typically the user's home directory on the system.

## User-Defined and Extra Configuration Files

Two command line options help control these configuration file locations:

- `--config` (or `-c`): Read the base configuration from this file, and not use or scan the default file paths.

Example use: when generating a standalone MySQL Router installation with the `--directory` bootstrap option, the generated `start.sh` passes this option to the generated `mysqlrouter.conf` inside that directory.

- `--extra-config` (or `-a`): Read this additional configuration file after the configuration files are read from either the default locations, or from files specified using the `--config` option.

For example:

```
shell> mysqlrouter --config /custom/path/to/router.conf --extra-config /another/config.conf
```

Multiple extra configuration options can be passed in and the files are loaded in the order they are entered, with `--config` options being loaded before the `--extra-config` options. For example:

```
shell> mysqlrouter --extra-config a.conf --config b.conf --extra-config c.conf
```

In the above example, `b.conf` is loaded first, and then `a.conf` and `c.conf`, in that order. Also, the default configuration file, such as `/etc/mysqlrouter/mysqlrouter.conf`, is not loaded because `--config` was used.

Each loaded configuration file overrides configuration settings from the previously read configuration files.

## Default Configuration File Locations (Linux)

The following lists default file location for the router to read configuration files on popular Linux platforms.

**Note**

Execute `mysqlrouter --help` to see the default configuration file locations (and their availability) on your system.

- Default system-wide installation under `/usr/local` : `/usr/local/etc/mysqlrouter.conf`
- RPM and Debian : `/etc/mysqlrouter/mysqlrouter.conf`
- On all systems, a bootstrapped standalone installation using `--directory` adds `mysqlrouter.conf` into the directory defined by `--directory`.

## Default Configuration File Locations (Windows)

Default file locations that MySQL Router searches for configuration files on Windows.



**Note**

Execute `mysqlrouter.exe --help` to see the default configuration file locations (and their availability) on your system.

- Default system-wide installation under `C:\ProgramData\MySQL\MySQL Router : C:\ProgramData\MySQL\MySQL Router\mysqlrouter.conf`
- In addition: `C:\Users\username\AppData\Roaming\mysqlrouter.conf` where `username` is replaced with your system's user.
- In addition to `mysqlrouter.conf`, for backwards compatibility the system also looks for `mysqlrouter.ini`
- With `--directory`: a bootstrapped standalone installation using `--directory` adds `mysqlrouter.conf` into the directory defined by `--directory`.

## 4.3 Configuration Options

Configuration file options and command-line options serve different purposes and are documented in separate locations.

When *bootstrapping*, the generated configuration file's settings depend on the bootstrap options passed into `mysqlrouter`. For example, passing in `--conf-use-sockets` enables socket connections by defining `socket` for each route in the generated configuration file. Or, `--directory` adds all generated files and subdirectories to a single directory and adjusts the generated configuration file values accordingly.

### 4.3.1 MySQL Router Command Line Programs

This section describes the MySQL Router commands. The `mysqlrouter` command is used for most tasks, including bootstrapping and running MySQL Router, and `mysqlrouter_plugin_info` is an optional debugging tool.

#### 4.3.1.1 `mysqlrouter` — Command Line Options

- [mysqlrouter Option Summaries](#)
- [mysqlrouter Option Descriptions](#)

MySQL Router accepts command line options that are passed into `mysqlrouter` to affect its behavior, or to bootstrap router based on an InnoDB cluster.

When starting Router, you can optionally use `--config` to pass in the main configuration file's location (otherwise the default location is used) and `--extra-config` for an additional configuration file.

Bootstrapping command line options affect the generated files and directories that are used when starting MySQL Router.

#### mysqlrouter Option Summaries

**Table 4.2 General Options**

Format	Description
<code>--config</code>	Read configuration options from the provided file.
<code>--extra-config</code>	Read this file after configuration files are read from either default locations or from files specified by the <code>--config</code> option.
<code>--help</code>	Display help text and exit.
<code>--user</code>	Run <code>mysqlrouter</code> as the user having the defined user name or numeric user id.

Format	Description
<code>--version</code>	Display version information and exit.

**Table 4.3 Bootstrapping Options**

Format	Description	Introduced
<code>--account-host</code>	The host pattern used for bootstrapped accounts	8.0.12
<code>--bootstrap</code>	Bootstrap and configure Router for operation with a MySQL InnoDB cluster.	
<code>--bootstrap-socket</code>	Connect to the MySQL metadata server through a Unix domain socket, used in conjunction with <code>--bootstrap</code> .	
<code>--conf-base-port</code>	Base port to use for listening Router ports.	
<code>--conf-bind-address</code>	IP address of the interface to which router's listening sockets should bind.	
<code>--conf-skip-tcp</code>	Whether to disable binding of a TCP port for incoming connections.	
<code>--conf-use-sockets</code>	Whether to use Unix domain sockets.	
<code>--connect-timeout</code>	Number of seconds before connection attempts to a metadata server are considered timed out	8.0.4
<code>--directory</code>	Creates a self-contained directory for a new instance of the Router.	
<code>--force</code>	Force reconfiguration of a possibly existing instance of the router.	
<code>--force-password-validation</code>	When creating a user account automatically, do not skip the <code>validate_password</code> mechanism.	
<code>--master-key-reader</code>	Script that returns the master key to STDOUT.	8.0.12
<code>--master-key-writer</code>	Script that reads the master key from STDIN.	8.0.12
<code>--name</code>	Gives a symbolic name for the router instance.	
<code>--password-retries</code>	The number of retries to use for generating the Router's user password.	
<code>--read-timeout</code>	Number of seconds before read operations to a metadata server are considered timed out	8.0.4
<code>--report-host</code>	Router's hostname; overrides auto-detection	8.0.12

**Table 4.4 SSL Options**

Format	Description	Introduced
<code>--ssl-ca</code>	Path to SSL Certificate Authority file to verify server's certificate against.	
<code>--ssl-capath</code>	Directory that contains trusted SSL Certificate Authority certificate files	
<code>--ssl-cert</code>	The client-side SSL certificate to facilitate client-side authentication during bootstrap	8.0.4
<code>--ssl-cipher</code>	A colon-separated list of SSL ciphers to allow, if SSL is enabled.	
<code>--ssl-crl</code>	Path to SSL CRL file to use when verifying server certificate.	
<code>--ssl-crlpath</code>	Path to directory containing SSL CRL files to use when verifying server certificate.	

Format	Description	Introduced
<code>--ssl-key</code>	The private SSL key to facilitate client-side authentication during bootstrap	8.0.4
<code>--ssl-mode</code>	SSL connection mode for use during bootstrap and normal operation, when connecting to the metadata server. Analogous to <code>--ssl-mode</code> in the mysql client.	
<code>--tls-version</code>	Comma-separated list of TLS versions to request, if SSL is enabled.	

Table 4.5 Windows Services Options

Format	Description
<code>--clear-all-credentials</code>	Clear all stored credentials
<code>--install-service</code>	On Windows, install MySQL Router as a service named MySQLRouter, and set it to automatically start when Windows restarts.
<code>--install-service-manual</code>	On Windows, install MySQL Router as a service named MySQLRouter, that can be manually started.
<code>--remove-credentials-section</code>	Remove a section's credentials
<code>--remove-service</code>	Remove MySQL Router as a Windows service.
<code>--service</code>	Start MySQL Router as a Windows service.
<code>--update-credentials-section</code>	Update a section's credentials

## mysqlrouter Option Descriptions

- `--version, -V`

Property	Value
Command-Line Format	<code>--version , -V</code>

Displays the version number and related information of the application, and exits. For example:

```
shell> mysqlrouter --version
MySQL Router v8.0.14 on Linux (64-bit) (GPL community edition)
```

- `--help, -?`

Property	Value
Command-Line Format	<code>--help , -?</code>

Display help and informative information, and exit.

The `--help` option has an added benefit. Along with the explanation of each of the options, the `--help` option also displays the paths used to find the configuration file, and also several default paths. The following excerpt of the `--help` output shows an example from a Ubuntu 16.04 machine:

```
shell> mysqlrouter --help
MySQL Router v8.0.14 on Linux (64-bit) (GPL community edition)
Copyright (c) 2015, 2017, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.
```

```
Start MySQL Router.

Configuration read from the following files in the given order (enclosed
in parentheses means not available for reading):
 (/etc/mysqlrouter/mysqlrouter.conf)
 /home/philip/.mysqlrouter.conf
Plugin Path:
 /usr/lib/x86_64-linux-gnu/mysqlrouter
Default Log Directory:
 /var/log/mysqlrouter
Default Persistent Data Directory:
 /var/lib/mysqlrouter
Default Runtime State Directory:
 /run/mysqlrouter

Usage: mysqlrouter [-V|--version] [-?|--help]
...
```

The configuration section shows the order for the paths that may be used for reading the configuration file. In this case, only the second file is accessible.

- `--bootstrap URI, -B URI`

Property	Value
Command-Line Format	<code>--bootstrap URI, -B URI</code>
Type	String

The main option to perform a bootstrap of MySQL Router by connecting to the InnoDB cluster metadata server at the URI provided. MySQL Router configures itself based on the information retrieved from the InnoDB cluster metadata server. A password is prompted for if needed. If a username is not provided as part of the URI then the default user name "root" is used. See [Connecting using a URI String](#) for information on using a path to specify a server instance.



**Note**

While `--bootstrap` accepts a URI for TCP/IP connections, using the `--bootstrap-socket` option with a local Unix domain socket name replaces the "host:port" part of the URI passed to the `--bootstrap` option with the socket on the same machine.

By default, the bootstrap process performs a system-wide configuration of MySQL Router. Only one instance of MySQL Router can be configured for system-wide operation. The system instance of MySQL Router has a `router_name` of "default". If additional instances are desired, use the `--directory` option to create self-contained MySQL Router installations.

**URI:** a server instance from an InnoDB cluster to fetch metadata information from. If the provided **URI** is a read-only instance, MySQL Router automatically reconnects to a read-write instance in the InnoDB cluster so it can register MySQL Router.

If a configuration file already exists when you start MySQL Router with the `--bootstrap`, the existing `router_id` in that file is reused, and a reconfiguration process occurs. The configuration file is regenerated from scratch and the MySQL Router's metadata server account is recreated, although with the same name.

During the reconfiguration process, all changes made to an existing configuration file are discarded. To customize a configuration file and still retain the ability of automatic reconfiguration (bootstrapping), you can use the `--extra-config` command line option to specify an additional configuration file that is read after the main configuration file. These configuration options are used because this extra configuration file is loaded after the main configuration file.

The bootstrap process creates a new MySQL user account with a randomly generated password to use by that specific MySQL Router instance. This account is used by MySQL Router when

connecting to the metadata server and InnoDB cluster to fetch information about its current state. For detailed information about this user including how its password is stored and the MySQL privilege it requires, see documentation for the [MySQL user option](#).

The generated configuration file is named `mysqlrouter.conf`, and its location depends on the type of instance being configured, the system, and the package. For system-wide installations, the generated configuration file is added to the system's configuration directory such as `/etc` or `%PROGRAMDATA%\MySQL\MySQL Router\`. Executing `mysqlrouter --help` will display this location.

The `--user` option is required if executing a bootstrap with a super user (`uid=0`). Although not recommended, forcing the super user is possible by passing its name as an argument such as `--user=root`.

Using `--bootstrap` adds default values to the generated MySQL Router configuration file, and some of these default values depend on other conditions. Listed below are some of the conditions that affect the generated default values, where default is defined by passing in `--bootstrap` by itself.

**Table 4.6 Conditions that affect default `--bootstrap` values**

Condition	Description
<code>--conf-base-port</code>	Modifies generated <code>bind_port</code> values for each connection type.  By default, generated <code>bind_port</code> values are as follows: For the classic protocol, Read-Write uses 6446 and Read-Only uses 6447, and for the X protocol Read-Write uses 64460 and Read-Only uses 64470.
<code>--conf-use-sockets</code>	Inserts <code>socket</code> definitions for each connection type.
<code>--conf-skip-tcp</code>	TCP/IP connection definitions are not defined.
<code>--directory</code>	Affects all file paths, and also generates additional files.
<b>Single primary mode is disabled</b>	If the <code>group_replication_single_primary_mode</code> MySQL Server option is disabled (it is enabled by default), only Read-Write (and not Read-Only) connections are defined. For additional information, see <a href="#">Bootstrapping and group_replication_single_primary_mode</a> .
Other	This list is not exhaustive, other options and conditions also affect the generated values.

- `--bootstrap-socket socket_name`

Property	Value
<b>Command-Line Format</b>	<code>--bootstrap-socket socket_name</code>
<b>Platform Specific</b>	Linux

Used in conjunction with `--bootstrap` to bootstrap using a local Unix domain socket instead of TCP/IP. The `--bootstrap-socket` value replaces the "host:port" part in the `--bootstrap` definition with the assigned socket name for connecting to the MySQL metadata server using Unix domain sockets. This is the MySQL instance that is being bootstrapped from, and this instance must be on the same machine if sockets are used. For additional details about how bootstrapping works, see `--bootstrap`.

This option is different than the `--conf-use-sockets` command line option that sets the `socket` configuration file option during the bootstrap process.

This option is not available on Windows.

- `--directory dir_path, -d dir_path`

Property	Value
<b>Command-Line Format</b>	<code>--directory dir_path, -d dir_path</code>
<b>Type</b>	String

Specifies that a self-contained MySQL Router installation will be created at the defined directory instead of configuring the system-wide router instance. This also allows multiple router instances to be created on the same system.

The self-contained directory structure for Router is:

```
$path/start.sh
$path/stop.sh
$path/mysqlrouter.pid
$path/mysqlrouter.conf
$path/mysqlrouter.key
$path/run
$path/run/keyring
$path/data
$path/log
$path/log/mysqlrouter.log
```

If this option is specified, the keyring file is stored under the runtime state directory of that instance, under `run/` in the specified directory, as opposed to the system-wide runtime state directory.

If `--conf-use-sockets` is also enabled then the generated socket files are also added to this directory.

- `--master-key-writer`

Property	Value
<b>Command-Line Format</b>	<code>--master-key-writer file_path</code>
<b>Introduced</b>	8.0.12
<b>Type</b>	String

This optional bootstrap option accepts a script that reads the master key from `STDIN`. It also uses the `ROUTER_ID` environment variable set by MySQL Router before the `master-key-writer` script is called.

The `master-key-writer` and `master-key-reader` options must be used together, and using them means the `master_key_file` option must not be defined in `mysqlrouter.conf` as the master key is not written to the `mysqlrouter.key` master key file.

This is also written to the generated MySQL Router configuration file as the `master-key-writer [DEFAULT]` option.

Example contents of a bash script named `writer.sh` used in our example:

```
#!/bin/bash
KID=$(keyctl padd user ${ROUTER_ID} @us <&0)
```

Example usage:



```
shell> mysqlrouter --bootstrap=127.0.0.1:3310 --master-key-reader=./reader.sh --master-key-writer=./w
```

This also affects the generated `mysqlrouter.conf`, for example:

```
[DEFAULT]
...
master-key-reader=reader.sh
master-key-writer=writer.sh
```

- `--master-key-reader`

Property	Value
<b>Command-Line Format</b>	<code>--master-key-reader file_path</code>
<b>Introduced</b>	8.0.12
<b>Type</b>	String

This optional bootstrap option accepts a script that writes the master key to *STDOUT*. It also uses the `ROUTER_ID` environment variable set by MySQL Router before the `master-key-reader` script is called.

The `master-key-reader` and `master-key-writer` options must be used together, and using them means the `master_key_file` option must not be defined in `mysqlrouter.conf` as the master key is not written to the `mysqlrouter.key` master key file, and instead uses the value provided by this option's script.

This is also written to the generated MySQL Router configuration file as the `master-key-reader [DEFAULT]` option.

Example contents of a bash script named `reader.sh` used in our example:

```
#!/bin/bash

KID_=$(keyctl search @us user ${ROUTER_ID} 2>/dev/null)
if [ ! -z $KID_ ]; then
    keyctl pipe $KID_
fi
```

Example usage:

```
shell> mysqlrouter --bootstrap=127.0.0.1:3310 --master-key-reader=./reader.sh --master-key-writer=./w
```

This also affects the generated `mysqlrouter.conf`, for example:

```
[DEFAULT]
...
master-key-reader=reader.sh
master-key-writer=writer.sh
```

- `--account-host`

Property	Value
<b>Command-Line Format</b>	<code>--account-host host_pattern</code>
<b>Introduced</b>	8.0.12
<b>Type</b>	String

Property	Value
Default Value	%

The host pattern used for accounts created by MySQL Router during the bootstrap process. This is optional and defaults to '%'.  
 Pass in this option multiple times to define multiple patterns, in which case the generated MySQL accounts use the same password.



**Note**

Router does not perform sanity checking and does not ensure that the pattern authorizes Router to connect.



**Note**

Bootstrapping reuses existing Router accounts by dropping and recreating the user, and this user recreation process applies to every host.

Examples:

```
# One host
shell> mysqlrouter --bootstrap localhost:3310 --account-host host1

# Or, multiple hosts
shell> mysqlrouter --bootstrap localhost:3310 --account-host host1 --account-host host2 --account-host host3
```

- `--conf-use-sockets`

Property	Value
Command-Line Format	<code>--conf-use-sockets</code>
Platform Specific	Linux

Enables local Unix domain sockets.

This option is used while bootstrapping, and enabling it adds the `socket` option to the generated configuration file.

The name of the generated socket file depends on the `mode` and `protocol` options. With the classic protocol enabled, the file is named `mysql.sock` in read-write mode, and `mysqlro.sock` in read-only mode. With the X Protocol enabled, the file is named `mysqlx.sock` in read-write mode, and `mysqlxro.sock` in read-only mode.

This option is not available on Windows.

- `--report-host`

Property	Value
Command-Line Format	<code>--report-host hostname</code>
Introduced	8.0.12
Type	String

Optionally define Router's hostname instead of relying on auto-detection to determine the externally visible hostname registered to metadata during the bootstrap process.

Router does not check or confirm that the supplied hostname is reachable, and it only checks the hostname string for illegal characters. Only alphanumeric, '-', '.', and '\_' characters are allowed.

The supplied hostname is written to the `host_name` field of the `mysql_innodb_cluster_metadata.hosts` table in the MySQL InnoDB cluster metadata store.

- `--conf-skip-tcp`

Property	Value
<b>Command-Line Format</b>	<code>--conf-skip-tcp</code>
<b>Platform Specific</b>	Linux

Skips configuration of a TCP port for listening to incoming connections. See also `--conf-use-sockets`.

This option is not available on Windows.

- `--conf-base-port port_num`

Property	Value
<b>Command-Line Format</b>	<code>--conf-base-port port_num</code>
<b>Type</b>	Integer

Base (first) value used for the listening TCP ports by setting `bind_port` for each bootstrapped route.

This value is used for the classic read-write route, and each additional allocated port is incremented by a value of one. The port order set is classic read-write / read-only, and then x read-write / read-only.

Example usage:

```
# Example without --conf-base-port
shell> mysqlrouter --bootstrap root@localhost:3310
...
Classic MySQL protocol connections to cluster 'devCluster':
- Read/Write Connections: localhost:6446
- Read/Only Connections: localhost:6447

X protocol connections to cluster 'devCluster':
- Read/Write Connections: localhost:64460
- Read/Only Connections: localhost:64470

# Example demonstrating --conf-base-port behavior
shell> mysqlrouter --bootstrap root@localhost:3310 --conf-base-port 6446
...
Classic MySQL protocol connections to cluster 'devCluster':
- Read/Write Connections: localhost:6446
- Read/Only Connections: localhost:6447

X protocol connections to cluster 'devCluster':
- Read/Write Connections: localhost:6448
- Read/Only Connections: localhost:6449
```

- `--conf-bind-address address`

Property	Value
<b>Command-Line Format</b>	<code>--conf-bind-address address</code>
<b>Type</b>	String
<b>Default Value</b>	0.0.0.0

Modifies the `bind_address` value set by `--bootstrap` in the generated Router configuration file. By default, bootstrapping sets `bind_address=0.0.0.0` for each route, and this option changes that value.



**Note**

The default `bind_address` value is `127.0.0.1` if `bind_address` is not defined.

- `--read-timeout num_seconds`

Property	Value
<b>Command-Line Format</b>	<code>--read-timeout num_seconds</code>
<b>Introduced</b>	8.0.4
<b>Type</b>	Integer
<b>Default Value</b>	30

Number of seconds before read operations to a metadata server are considered timed out.

This affects read operations during both the bootstrap process, and also affects normal MySQL Router operations by setting the associated `read_timeout` option in the generated `mysqlrouter.conf`.

This option is set under the `[DEFAULT]` namespace.

- `--connect-timeout num_seconds`

Property	Value
<b>Command-Line Format</b>	<code>--connect-timeout num_seconds</code>
<b>Introduced</b>	8.0.4
<b>Type</b>	Integer
<b>Default Value</b>	30

Number of seconds before connection attempts to a metadata server are considered timed out.

This affects connections during both the bootstrap process, and also affects normal MySQL Router operations by setting the associated `connect_timeout` option in the generated `mysqlrouter.conf`.

There are two `connect_timeout` variants. The metadata server variant is defined under the `[DEFAULT]` namespace, while the MySQL server variant is defined under the `[routing]` namespace.

- `--user {user_name|user_id}, -u {user_name|user_id}`

Property	Value
<b>Command-Line Format</b>	<code>--user {user_name user_id}, -u {user_name user_id}</code>
<b>Platform Specific</b>	Linux
<b>Type</b>	String

Run `mysqlrouter` as the user having the name `user_name` or the numeric user ID `user_id`. “User” in this context refers to a system login account, not a MySQL user listed in the grant tables. When bootstrapping, all generated files are owned by this user, and this also sets the associated `user` option.

This system `user` is defined in the configuration file under the `[DEFAULT]` namespace. For additional information, see the `user` option's documentation that `--user` configures.

The `--user` option is required if executing a bootstrap as a super user (`uid=0`). Although not recommended, forcing the super user is possible by passing its name as an argument, such as `--user=root`.

This option is not available on Windows.

- `--name router_name`

Property	Value
<b>Command-Line Format</b>	<code>--name router_name</code>
<b>Type</b>	String

On initial bootstrap, specifies a symbolic name for a self-contained Router instance. This option is optional, and is used with `--directory`. When creating multiple instances, the names must be unique.

- `--force-password-validation`

Property	Value
<b>Command-Line Format</b>	<code>--force-password-validation</code>
<b>Platform Specific</b>	Linux

By default, MySQL Router skips the MySQL Server's `validate_password` mechanism and instead Router generates and uses a STRONG password based on known `validate_password` default settings. This is because `validate_password` can be configured by the user and Router can not take into account unusual custom settings.

This option ensures that password validation (`validate_password`) is not skipped for generated passwords, and it is disabled by default.

- `--password-retries num_retries`

Property	Value
<b>Command-Line Format</b>	<code>--password-retries num_retries</code>
<b>Type</b>	Integer
<b>Default Value</b>	20
<b>Minimum Value</b>	1
<b>Maximum Value</b>	10000

Specifies the number of times MySQL Router should attempt to generate a password when creating user account with the password validation rules. The default value is 20. The valid range is 1 to 10000.

The most likely reason for failure is due to custom `validate_password` settings with unusual requirements such as a 50 character minimum. In that fail scenario, either `--force-password-validation` is set to true and/or the `mysql_native_password` MySQL Server plugin is disabled (this plugin allows bypassing validation).

- `--force`

Property	Value
<b>Command-Line Format</b>	<code>--force</code>

Force a reconfiguration over a previously configured router instance on the host.

- `--ssl-mode mode`

Property	Value
<b>Command-Line Format</b>	<code>--ssl-mode mode</code>
<b>Type</b>	String
<b>Default Value</b>	PREFERRED
<b>Valid Values</b>	PREFERRED DISABLED REQUIRED VERIFY_CA VERIFY_IDENTITY

SSL connection mode for use during bootstrap and normal operation when connecting to the metadata server. Analogous to `--ssl-mode` in the `mysql` client.

During bootstrap, all connections to metadata servers made by the Router will use the SSL options specified. If `ssl_mode` is not specified in the configuration, it will default to PREFERRED. During normal operation, after Router is launched, its Metadata Cache plugin will read and honor all configured SSL settings.

When set to a value other than the default (PREFERRED), an `ssl_mode` entry is inserted under the `[metadata_cache]` section in the generated configuration file.

Available values are DISABLED, PREFERRED, REQUIRED, VERIFY\_CA, and VERIFY\_IDENTITY. PREFERRED is the default value. As with the `mysql` client, this value is case-insensitive.

The configuration file equivalent is documented separately at `ssl_mode`.

- `--ssl-cert file_path`

Property	Value
<b>Command-Line Format</b>	<code>--ssl-key file_path</code>
<b>Introduced</b>	8.0.4
<b>Type</b>	String

The path name of the SSL public key certificate file in PEM format. This is used to facilitate client-side authentication during the bootstrap process. This directly matches and uses functionality of the MySQL client's `--ssl-cert` option.

Like `--ssl-key`, this option is only used during bootstrap that uses a root account. It is useful when the root account was created with REQUIRE X509, and therefore logging in as root requires the client to authenticate itself.

- `--ssl-key file_path`

Property	Value
<b>Command-Line Format</b>	<code>--ssl-key file_path</code>
<b>Introduced</b>	8.0.4
<b>Type</b>	String

The path name of the SSL private key file in PEM format. This is used to facilitate client-side authentication during the bootstrap process. This directly matches and uses functionality of the MySQL client's `--ssl-key` option.

Like `--ssl-cert`, this option is only used during a bootstrap process that uses a root account. It is useful when the root account was created with REQUIRE X509, and therefore logging in as root requires the client to authenticate itself.

- `--ssl-cipher ciphers`

Property	Value
Command-Line Format	<code>--ssl-cipher <i>ciphers</i></code>
Type	String
Default Value	

A colon-separated (":") list of SSL ciphers to allow, if SSL is enabled.

- `--tls-version versions`

Property	Value
Command-Line Format	<code>--tls-version <i>versions</i></code>
Type	String
Default Value	

A comma-separated (",") list of TLS versions to request, if SSL is enabled.

- `--ssl-ca file_path`

Property	Value
Command-Line Format	<code>--ssl-ca <i>file_path</i></code>
Type	String
Default Value	

Path to the SSL CA file to verify a server's certificate against.

- `--ssl-capath dir_path`

Property	Value
Command-Line Format	<code>--ssl-capath <i>dir_path</i></code>
Type	String
Default Value	

Path to directory containing the SSL CA files to verify a server's certificate against.

- `--ssl-crl file_path`

Property	Value
Command-Line Format	<code>--ssl-crl <i>file_path</i></code>
Type	String
Default Value	

Path to the SSL CRL file to use when verifying a server's certificate.

- `--ssl-crlpath dir_path`

Property	Value
Command-Line Format	<code>--ssl-crlpath dir_path</code>
Type	String
Default Value	

Path to the directory containing SSL CRL files to use when verifying a server's certificate.

- `--config file_path, -c file_path`

Property	Value
Command-Line Format	<code>--config file_path, -c file_path</code>

Used to provide a path and file name for the configuration file to use. Use this option if you want to use a configuration file located in a folder other than the default locations.

When used with `--bootstrap`, and if the configuration file already exists, a copy of the current file is saved with a `.bak` extension if the generated configuration file contents is different than the original. Existing `.bak` files are overwritten.

- `--extra-config file_path, -a file_path`

Property	Value
Command-Line Format	<code>--extra-config file_path, -a file_path</code>

Used to provide an optional, additional configuration file to use. Use this option if you want to split the configuration file into two parts for testing, multiple instances of the application running on the same machine, etc.

This configuration file is read after the main configuration file. If there are conflicts (an option is set in multiple configuration files), values from the file that is loaded last is used.

- `--install-service`

Property	Value
Command-Line Format	<code>--install-service</code>
Platform Specific	Windows

Install Router as a Windows service that automatically starts when Windows starts. The service name is `MySQLRouter`.

This installation process does not validate configuration files passed in via `--config`.

This option is only available on Windows.

- `--install-service-manual`

Property	Value
Command-Line Format	<code>--install-service-manual</code>
Platform Specific	Windows



This option is only available on Windows.

- `--remove-service`

Property	Value
<b>Command-Line Format</b>	<code>--remove-service</code>
<b>Platform Specific</b>	Windows

Remove the Router Windows service.

This option is only available on Windows.

- `--service`

Property	Value
<b>Command-Line Format</b>	<code>--service</code>
<b>Platform Specific</b>	Windows

Start Router as a Windows service.

This option is only available on Windows.

- `--update-credentials-section`

Property	Value
<b>Command-Line Format</b>	<code>--update-credentials-section section_name</code>
<b>Platform Specific</b>	Windows

This option is only available on Windows, and refers to its password vault.

- `--remove-credentials-section section_name`

Property	Value
<b>Command-Line Format</b>	<code>--remove-credentials-section section_name</code>
<b>Platform Specific</b>	Windows

Remove the credentials for a given section.

This option is only available on Windows, and refers to its password vault.

- `--clear-all-credentials`

Property	Value
<b>Command-Line Format</b>	<code>--clear-all-credentials</code>
<b>Platform Specific</b>	Windows

Clear the password vault by removing all credentials stored in it.

This option is only available on Windows, and refers to its password vault.

#### 4.3.1.2 `mysqlrouter_plugin_info` — Command Line Options

The `mysqlrouter_plugin_info` utility is a debugging tool that inspects a MySQL Router plugin for potential conflicts and general problems.

Usage information:

```
shell> ./mysqlrouter_plugin_info --help

Usage:
  ./mysqlrouter_plugin_info <mysqlrouter_plugin_file> <mysql_plugin_name>

Example:
  ./mysqlrouter_plugin_info /usr/lib/mysqlrouter/routing.so routing

To print help information:
  ./mysqlrouter_plugin_info --help
To print application version:
  ./mysqlrouter_plugin_info --version

shell> ./bin/mysqlrouter_plugin_info --version

MySQLRouter Plugin Info App 8.0.3
```

Example usage:

```
shell> ./bin/mysqlrouter_plugin_info lib/mysqlrouter/routing.so routing
{
  "abi-version": "2.0",
  "arch-descriptor": "i386/darwin//",
  "brief": "Routing MySQL connections between MySQL clients/connectors and servers",
  "plugin-version": "0.0.1",
  "requires": [],
  "conflicts": []
}
```

### 4.3.2 Configuration File Options

When started, MySQL Router reads a list of *configuration files* that together make up the configuration of the router. At least one configuration file is required.

MySQL Router reads options from configuration files that closely resemble the traditional INI file format, with sections and options. These specify the options set when MySQL Router starts. For file syntax information, see [Section 4.1, “Configuration File Syntax”](#).

Options are defined under [sections](#), that dictate the option's meaning. For example, `user` under the `[DEFAULT]` section refers to the system user running router, while `user` under the `[metadata_cache]` section refers to the MySQL user that accesses metadata.

The following tables are separated by section, and summarize the MySQL Router options defined in a MySQL Router configuration file. Detailed information about each of these options, such as descriptions and allowed values, is documented below these tables.

#### General Options

Table 4.7 [DEFAULT]

Option Name	Description	Type
<code>config_folder</code>	Path to configuration files	String
<code>connect_timeout</code>	Number of seconds before connection attempts to a metadata server are considered timed out	Integer
<code>keyring_path</code>	Path to keyring file	String
<code>logging_folder</code>	Path to router logs	String
<code>master_key_path</code>	Path to master keyring file	String

Option Name	Description	Type
<code>master-key-reader</code>	Script that returns the master key to STDOUT	String
<code>master-key-writer</code>	Script that reads the master key from STDIN	String
<code>plugin_folder</code>	Path to router plugins	String
<code>runtime_folder</code>	Path to runtime files	String
<code>sinks</code>	Logging method(s) to receive configured log data	String
<code>thread_stack_size</code>	Size in KB of memory allocated to each thread stack	Integer
<code>user</code>	System user that router is run as	String

## Routing Options

Table 4.8 [routing]

Option Name	Description	Type
<code>bind_address</code>	Address router is bound to, also uses <code>bind_port</code> if a port is not defined	String
<code>bind_port</code>	Default port used by <code>bind_address</code>	Integer
<code>client_connect_timeout</code>	Maximum number of seconds to receive packets from MySQL server	Integer
<code>connect_timeout</code>	Number of seconds before connection attempts to a MySQL server are considered timed out	Integer
<code>destinations</code>	Routing destinations as either a comma-separated list of MySQL servers, or a metadata-cache definition	String
<code>dynamic_config</code>	Path to generated JSON file used to track and store active MySQL InnoDB cluster Metadata server addresses	String
<code>max_connect_error</code>	Maximum number of failed MySQL server connections before giving up	Integer
<code>max_connections</code>	Maximum number of connections assigned to a routed destination MySQL server	Integer
<code>mode</code>	Routing mode, how router chooses destination MySQL servers	String
<code>protocol</code>	Protocol for connecting to MySQL Server	String
<code>read_timeout</code>	Number of seconds before read operations to a metadata server are considered timed out	Integer
<code>routing_strategy</code>	Routing strategy (optional), how router chooses destination MySQL servers	String
<code>socket</code>	Path to unix domain socket file	String

## Metadata Cache Options

Table 4.9 [metadata\_cache]

Option Name	Description	Type
<code>bootstrap_servers</code>	MySQL servers with metadata, as a comma-separated list	String
<code>metadata_cluster</code>	InnoDB cluster name	String
<code>router_id</code>	Router ID	Integer
<code>ssl_mode</code>	SSL connection mode for connecting to the metadata server, defaults to PREFERRED if not set	String
<code>ttl</code>	Time To Live, in seconds	Integer
<code>user</code>	MySQL user that accesses the MySQL Server's metadata schema	String

## Logging Options

Table 4.10 [logger]

Option Name	Description	Type
<code>level</code>	Logging level	String

## MySQL Router Configuration File Option Descriptions

- `logging_folder`

Property	Value
Type	String
Default Value	<code>\$router_basepath</code>

Path to the MySQL Router log file directory. The log file is named `mysqlrouter.log`, and it is either generated or appended to if this file already exists.

Setting `logging_folder` to an empty value sends the messages to the console (**stdout**).



### Note

The default `logging_folder` value changed from "" to Router's base path in MySQL Router 2.1.

An example that sends logs to `/var/log/mysqlrouter/mysqlrouter.log`:

```
[DEFAULT]
logging_folder = /var/log/mysqlrouter
```

When the `--directory` bootstrap option is used, the generated configuration file sets it to `$directory/log/`.

- `plugin_folder`

Property	Value
Type	String
Default Value (Other)	<code>/usr/local/lib/mysqlrouter</code>
Default Value (Windows)	

Path to the MySQL Router plugins. This folder must match the MySQL Router installation directory. You should only set this if you have a custom installation where the plugins are not in the standard installation location.

*Default value:* `/usr/local/lib/mysqlrouter`

- `runtime_folder`

Property	Value
Type	String
Default Value (Other)	<code>/run/mysqlrouter</code>
Default Value (Windows)	

Path to the MySQL Router runtime files.

*Default value:* `/run/mysqlrouter`

- `master-key-writer`

Property	Value
Command-Line Format	<code>--master-key-writer file_path</code>
Introduced	8.0.12
Type	String

Script that reads the master key from STDIN. Set using the `--master-key-writer` command-line bootstrap option.

- `master-key-reader`

Property	Value
Command-Line Format	<code>--master-key-reader file_path</code>
Introduced	8.0.12
Type	String

Script that returns the master key to STDOUT. Set using the `--master-key-reader` command-line bootstrap option.

- `config_folder`

Property	Value
Type	String
Default Value (Other)	<code>/usr/local/etc/mysqlrouter</code>
Default Value (Windows)	

Path to the MySQL Router configuration files.



**Note**

The `config_folder` is currently set at compile time. The option could be used by future plugins when they have their own configuration files.

*Default value:* `/usr/local/etc/mysqlrouter`

- `sinks`

Property	Value
Introduced	8.0.16
Type	String
Valid Values (Other)	<code>consolelog</code> <code>filelog</code> <code>syslog</code>
Valid Values (Windows)	<code>consolelog</code> <code>filelog</code> <code>eventlog</code>

The sink(s) (different logging methods) that a defined log level are sent to.

Supported sink values are: `consolelog`, `filelog`, `eventlog` (on Windows), and `syslog` (on Unix-based systems). Use a comma-separated list to define multiple values.

*Default value:* `filelog` if the `logging_folder` option is not empty in the "[DEFAULT]" section, otherwise `consolelog`.

For example, to configure logger to use the file, console and the event log each using the debug log level configured in the `[logger]` section:

```
[logger]
level=debug
sinks=consolelog,eventlog,filelog
```

- `keyring_path`

Property	Value
Type	String
Default Value (Other)	<code>/run/mysql-router/keyring-data</code>
Default Value (Windows)	<code>%PROGRAMDATA%\MySQL\MySQL Router\keyring-data</code>

Points to the keyring file's location.

A system-wide bootstrap does not add this option to the generated configuration file, and assumes the keyring file is located in the system-wide runtime state directory. If `--directory` is also used, then the keyring file is stored under the runtime state directory of that instance, under `run/` in the specified directory.

System-wide default paths are used if this option is not defined.

Example usage:

```
keyring_path = /opt/myrouter/data/keyring
master_key_path = /opt/myrouter/mysqlrouter.key
```

- `master_key_path`

Property	Value
Type	String
Default Value (Other)	<code>/run/mysql-router/mysqlrouter.key</code>
Default Value (Windows)	<code>%PROGRAMDATA%\MySQL\MySQL Router\mysqlrouter.key</code>

The master key file's location. This option allows unattended decryption, as otherwise its location is requested at startup.

System-wide default paths are used if this option is not specified.

Example usage:

```
keyring_path = /opt/myrouter/data/keyring
master_key_path = /opt/myrouter/mysqlrouter.key
```

- `user (system)`

<b>Property</b>	<b>Value</b>
<b>Type</b>	String

Run `mysqlrouter` as the user having the name `user_name` or the numeric user ID `user_id`. "User" in this context refers to a system login account, not a MySQL user listed in the grant tables. This can also be assigned at runtime using the `--user` command line option.

On Linux, installing Router with official DEB or RPM packages creates a local system user and group named "mysqlrouter" on the host, and MySQL Router runs as this user by default. This account does not have shell access and its home directory points to the directory where the default configuration file is stored.

The purpose of this option is to run MySQL Router as a user with restricted system privileges. If the user does not exist on the system, or if an attempt to start Router as root is made, an error is emitted and Router exits.

MySQL Router can be bootstrapped and executed under any Operating System user and does not require special privileges other than read and write access to its own files. The files it accesses include plugins (read/execute), configuration file, logs, UNIX domain socket files (if enabled), and more.

By default, the configuration and log files are written to a system-wide location such as `/etc` and `/var/log`. Alternatively, Router can be bootstrapped to a self-contained directory of its own by using the `--directory` option. For example:

```
shell> sudo mysqlrouter --bootstrap localhost:3310 --directory /a/path/myrouter --user snoopy
```

In this example, Router creates `/a/path/myrouter` and adds all of the generated files and directories here, and these are only writable by the system user `snoopy`. Additionally, `user` is defined in the generated configuration file `/a/path/myrouter/mysqlrouter.conf`:

```
[DEFAULT]
user=snoopy
```



**Note**

This is different from the `user` definition defined in the `[metadata_cache]` section, which is a MySQL user.

- `bind_address`

<b>Property</b>	<b>Value</b>
<b>Type</b>	String
<b>Default Value</b>	127.0.0.1

Information related to the optional `bind_address` option:

- Routing entries can be bound to a network interface (NIC). The default `bind_address` is `127.0.0.1`. If a port is not defined here, then setting `bind_port` is required.
- By default, `--bootstrap` sets `bind_address=0.0.0.0` for each route in the generated Router configuration file. This value can be changed using `--conf-bind-address`.
- Binding to a specific IPv4 or IPv6 address allows and ensures that MySQL Router is not starting and routing the service on an NIC on which nothing is allowed to execute.

- It is not possible to specify more than one binding address per routing configuration group. However, using `0.0.0.0:$port` (where you define \$port) binds all network interfaces (IPs) on the host. IPv6 addresses can also be used.

Example usage:

```
bind_address = 127.0.0.1:7001
```



**Note**

The `bind_address` cannot be listed in the `destinations` list.

- `bind_port`

Property	Value
Type	Integer

Optionally, you can define a default port for `bind_address` using `bind_port`. If a port is not configured in `bind_address`, then `bind_port` is required and used.

The three examples below all result in `bind_address = 127.0.0.1:7001`

```
[routing:example_1]
bind_port = 7001
```

```
[routing:example_2]
bind_port = 7001
bind_address = 127.0.0.1
```

```
[routing:example_3]
bind_address = 127.0.0.1:7001
```

- `socket`

Property	Value
Platform Specific	Linux
Type	String

Sockets are enabled using the `socket` option, which can be specified with or without the TCP `bind_port` and `bind_address` options. An example:

```
[routing]
socket = /tmp/mysqlrouter.sock
destinations = a.example.com:3306,b.example.com:3307
```

When launching MySQL Router, Router will refuse to run if either the socket file already exists or it cannot be written to.

Relative paths are acceptable and based on the current working directory where Router is launched.

Router can listen to both TCP sockets and Unix sockets simultaneously. For example, the following `[routing]` configuration example is valid and configures Router to listen for connections on both **localhost:1234** and `/tmp/mysqlrouter.sock`:

```
[routing:my_redirect]
bind_address = localhost:1234
```



```
socket = /tmp/mysqlrouter.sock
mode = read-write
destinations = localhost:57121, localhost:57122, localhost:57123
```



**Note**

A Unix domain socket length limit is platform-specific and should not exceed the system's allowed length.

- [protocol](#)

<b>Property</b>	<b>Value</b>
<b>Type</b>	String
<b>Default Value</b>	<code>classic</code>
<b>Valid Values</b>	<code>classic</code> <code>x</code>

Used by the routing plugin when connecting to the destination MySQL server, and can be set to either "classic" (default), or "x" (X Protocol).

Example usage:

```
[routing:basic_failover]
bind_port = 7001
mode = read-write
destinations = 10.20.200.1:33060, 10.20.200.2:33060
protocol = x
```

The [protocol](#) option also affects the default port used by by each destination. If a destination port is not configured, then the default port is 3306 for "classic" (default), 33060 for "x" (X Protocol).

- [connect\\_timeout](#)

<b>Property</b>	<b>Value</b>
<b>Type</b>	Integer
<b>Default Value</b>	<code>1</code>
<b>Minimum Value</b>	<code>1</code>
<b>Maximum Value</b>	<code>65536</code>

Timeout value used by the MySQL Router when connecting to the destination MySQL server. The default value is 1 second. The value cannot be unlimited, and an invalid value results in a configuration error. The valid range is between 1 and 65536. You should keep this value low.

For example, when using `read-write` mode, the value can be a little higher to wait for the PRIMARY to become available. When using `read-only` mode for secondary connections, a lower value makes more sense because Router selects a new server during connection routing.

Example usage:

```
[routing]
connect_timeout = 1
```

- [connect\\_timeout](#)

<b>Property</b>	<b>Value</b>
<b>Type</b>	Integer

Property	Value
Default Value (>= 8.0.14)	15
Default Value (<= 8.0.13)	30

Timeout value used by the MySQL Router when connecting to the MySQL metadata server. The default value is 30 seconds.

Example usage:

```
[DEFAULT]
connect_timeout = 30
```

- `read_timeout`

Property	Value
Type	Integer
Default Value	30

Timeout value used by the MySQL Router when reading from the MySQL metadata server. The default value is 30 seconds.

Example usage:

```
[DEFAULT]
read_timeout = 30
```

- `destinations`

Property	Value
Type	String

Provides host information for establishing connections. It accepts either a comma-separated list of destination addresses or a metadata-cache link to an InnoDB cluster.

Example usage with specific hosts (static routing):

```
destinations = a.example.com,b.example.com,c.example.com
```



#### Note

If a destination's port is not explicitly set, then the default port is 3306 if `protocol` is set to "classic" or not set (default), or port 33060 if `protocol` is set to "x".

Example usage with InnoDB cluster metadata cache:

```
destinations=metadata-cache://mycluster/default?role=PRIMARY
```

The `metadata-cache` URI options are:

- `role`: Determines the type of instances available to the connection. Acceptable values are PRIMARY, SECONDARY, or PRIMARY\_AND\_SECONDARY.

The `routing_strategy` `mysqlrouter.conf` option defines the specific strategy, and the default metadata-cache routing strategy is *round-robin*.

- `disconnect_on_promoted_to_primary`: Controls whether existing client connections to a secondary are closed when the secondary is promoted as a primary. The default value is "no", meaning existing client connections to the promoted secondary are not closed after promotion. Set `disconnect_on_promoted_to_primary=yes` in the URI to close these existing connections.

This option was added in MySQL Router 8.0.12.

- `disconnect_on_metadata_unavailable`: Controls whether existing client connections are closed when the group is overloaded. The default value is "no", meaning existing client connections are not closed when the group is overloaded. Set `disconnect_on_metadata_unavailable=yes` in the URI to close these existing connections.

This option was added in MySQL Router 8.0.12.



**Note**

Related, these conditions cause disconnections: connections to a primary after the primary is downgraded to a secondary, and connections to a node that are no longer part of the cluster.

- `dynamic_config`

Property	Value
Introduced	8.0.14
Type	String

This tracks and stores active MySQL InnoDB cluster Metadata server addresses and loads them if Router is restarted. This functionality is activated by `--bootstrap` and is preferred over the deprecated static `bootstrap_server_addresses` option.

Bootstrapping defines `dynamic_config` in `mysqlrouter.conf` under the [DEFAULT] section. Its a path to the generated JSON file named `state.json` and is initialized with InnoDB cluster Metadata server addresses and the group replication ID; additional information is added and updated while Router is running.

Example `mysqlrouter.conf` entry:

```
[DEFAULT]
dynamic_config=/opt/myrouter/data/state.json
```

Example `state.json` generated by `--bootstrap`:

```
{
  "metadata-cache": {
    "group-replication-id": "4b9e817a-0254-11e9-9cc0-080027bb5030",
    "cluster-metadata-servers": [
      "mysql://localhost:3310",
      "mysql://localhost:3320",
      "mysql://localhost:3330"
    ]
  },
  "version": "1.0.0"
}
```

The `dynamic_config` and deprecated `bootstrap_server_addresses` options cannot be set at the same time. For backwards compatibility, if only `bootstrap_server_addresses` is set then it functions as it did in previous Router versions and this dynamic configuration functionality is not used.

This option was added in MySQL Router 8.0.14.

- `mode`

Property	Value
Type	String
Valid Values	<code>read-write</code> <code>read-only</code>

The deprecated mode option sets Router's scheduling, and the two supported mode values are:



#### Important

MySQL Router 8.0.4 introduced the `routing_strategy` option as a more flexible way to configure the **mode schedule**.

Both `mode` and `routing_strategy` cannot be set at the same time. Setting one is required for static routing while they are optional with InnoDB cluster.

- **read-write:** Typically used for routing to a master or primary MySQL instance.

**Mode Schedule:** In *read-write* mode, all traffic is directed to the initial address on the list. If that fails, then MySQL Router will try the next entry on the list continues trying each MySQL server on the list. If no more MySQL servers are available on the list then routing is aborted.



#### Note

With `routing_strategy`, this same behavior can be defined using `routing_strategy=next-available` instead of `mode=read-write`.

The first successful MySQL server contacted is saved in memory as the first to try for future incoming connections. This is a temporary state, meaning this is forgotten after MySQL Router is restarted.

```
[routing:example_strategy_mode]
bind_port = 7001
destinations = primary1.example.com,primary2.example.com,primary3.example.com
mode = read-write
```

Because `mode` is deprecated, the previous example should use `routing_strategy` instead:

```
[routing:example_strategy]
bind_port = 7001
destinations = primary1.example.com,primary2.example.com,primary3.example.com
routing_strategy = next-available
```

- **read-only:** Typically used for routing to a slave or secondary MySQL instance.

**Mode Schedule:** Mode *read-only* uses a simple **round-robin** method to go through the list of MySQL Servers. It sends the first connection to the first address on the list, the next connection to the second address, and so on, and circles back to the first address after the list is exhausted.



#### Note

With `routing_strategy`, this same behavior can be defined using `routing_strategy=round-robin` instead of `mode=read-only`.

If a MySQL server is not available then the next server is tried. When none of the MySQL servers on the list are available then the routing is aborted.

Unavailable MySQL servers are quarantined. Their availability is rechecked and when available they are put back onto the available `destinations` list. The destinations order is maintained.

```
[routing:ro_route_mode]
bind_port = 7002
destinations = secondary1.example.com,secondary2.example.com,secondary3.example.com
mode = read-only
```

Because `mode` is deprecated, the previous example should use `routing_strategy` instead:

```
[routing:ro_route]
bind_port = 7002
destinations = secondary1.example.com,secondary2.example.com,secondary3.example.com
routing_strategy=round-robin
```

Alternatively, the previous `destinations` example could use `metadata-cache` to utilize InnoDB cluster's metadata cache that dynamically configures host information. For example: .

```
[routing:ro_route]
bind_port = 7002
destinations=metadata-cache://myCluster/default?role=SECONDARY
routing_strategy=round-robin
```

- `routing_strategy`

Property	Value
Introduced	8.0.4
Type	String
Valid Values	<code>first-available</code> <code>next-available</code> <code>round-robin</code> <code>round-robin-with-fallback</code>

The routing strategy defines how MySQL Router chooses MySQL servers to connect to.



**Important**

MySQL Router 8.0.4 introduced the `routing_strategy` option as a more flexible way to define the strategy. Previously this behavior was defined using the now deprecated `mode` option.

Both `routing_strategy` and `mode` cannot be set at the same time. Setting one is required for static routing while they are optional with InnoDB cluster.

Available strategies:

- `first-available`: the new connection is routed to the first available server from the destinations list. In case of failure, the next available server is used. This cycle continues until all servers are unavailable.

- `next-available`: like `first-available`, in that the new connection is routed to the first available server from the destinations list. Unlike `first-available`, if a server is marked as unreachable then it gets discarded and is never used again as a destination.

This strategy is backward compatible with MySQL Router 2.x's `mode`'s `read-write` behavior. Its limitations include:

- After all nodes of the selection are discarded, there is no way to add servers back to the list.
- After restarting MySQL Router, all knowledge of what servers are discarded is lost and all servers are available again.
- `round-robin`: for load-balancing, each new connection is made to the next available server in a round-robin fashion.
- `round-robin-with-fallback`: for load-balancing, each new connection is made to the next available secondary server in a round-robin fashion. If a secondary server is not available then servers from the primary list are used in round-robin fashion.
- If mode is `read-write`, the default strategy is `first-available` as of MySQL Router 8.0 and exhibits `next-available` behavior in MySQL Router 2.1.
- If mode is `read-only`, the default strategy is `round-robin`.
- If InnoDB cluster role is `PRIMARY`, the default strategy is `round-robin`, and both `first-available` and `round-robin` are the available strategies.
- If InnoDB cluster role is `SECONDARY`, the default strategy is `round-robin`, and `first-available`, `round-robin`, and `round-robin-with-fallback` are the available strategies.
- If InnoDB cluster role is `PRIMARY_AND_SECONDARY`, the default strategy is `round-robin`, and both `first-available` and `round-robin` are the available strategies.
- `max_connections`

Property	Value
Type	Integer
Default Value	512
Minimum Value	1
Maximum Value	65536

Each routing can limit the number of routes or connections. One possible use is to help prevent possible Denial-Of-Service (DOS) attacks. The default value is 512, and the valid range is between 1 and 65536.

This is similar to [MySQL Server's max\\_connections](#) server system variable.

```
max_connections = 512
```



**Note**

MySQL Router 2.1.5 and 8.0.4 introduced functionality that increases the concurrent connection limit from around 500 to 5000 connections. This operating system dependent limitation was changed to use a `poll()` implementation instead of `select()`.

- `thread_stack_size`

Property	Value
Introduced	8.0.12
Type	Integer
Default Value	64
Minimum Value	1
Maximum Value	65535

The stack size allocated for each thread. It is measured in kilobytes, and defaults to 64.

```
[DEFAULT]
thread_stack_size=128
```

- `max_connect_errors`

Property	Value
Type	Integer
Default Value	100
Minimum Value	1
Maximum Value	4294967295

The default value is 100, and the valid range is between 1 and  $2^{32}$  (4294967295, an unsigned int).

This is similar to [MySQL Server's max\\_connect\\_errors](#) server system variable.

This can cause a slight performance penalty if an application performs frequent reconnections, because MySQL Router attempts to discover if connection-related errors are present.

A successful connection resets the error counter (as of 8.0.14).

Each routing has its own list of blocked hosts. Blocked clients receive the MySQL Server error 1129 code with a slightly different error message: "1129: Too many connection errors from fail.example.com". The Router logs contain extra information for blocked clients, such as: INFO [...] 1 authentication errors for fail.example.com (max 100) WARNING [...] blocking client host fail.example.com

```
max_connect_errors = 100
```

- `client_connect_timeout`

Property	Value
Type	Integer
Default Value	9
Minimum Value	2
Maximum Value	31536000

This is similar to [MySQL Server's connect\\_timeout](#) server system variable.

The default value is 9, which is one less than the MySQL 5.7 default. The valid range is between 2 and 31536000.

```
client_connect_timeout = 9
```

- `router_id`

<b>Property</b>	<b>Value</b>
<b>Type</b>	Integer

The MySQL Router ID.

- `ssl_mode`

<b>Property</b>	<b>Value</b>
<b>Type</b>	String
<b>Default Value</b>	PREFERRED
<b>Valid Values</b>	PREFERRED DISABLED REQUIRED VERIFY_CA VERIFY_IDENTITY

SSL mode for connecting to the MySQL metadata server. It defaults to `PREFERRED` if not set.

When set to `PREFERRED` (the default), bootstrapping will warn when SSL is not used and connection to the metadata server is unencrypted.

Available values are `DISABLED`, `PREFERRED`, `REQUIRED`, `VERIFY_CA`, and `VERIFY_IDENTITY`. As with the `mysql` client, this value is case-insensitive.

There is also a runtime option for bootstrapping; see `--ssl-mode`.

- `bootstrap_server_addresses`

<b>Property</b>	<b>Value</b>
<b>Deprecated</b>	8.0.14
<b>Type</b>	String

Points to a list of MySQL servers with metadata that can be connected to. After the metadata has been accessed, the metadata cache switches to the servers that are present in the primary ReplicaSet to fetch the metadata. They are also known as bootstrap servers.

This option is deprecated in MySQL Router 8.0.14 and no longer generated by the bootstrap process. Instead, `dynamic_config` was added as a replacement.

- `user` (MySQL)

<b>Property</b>	<b>Value</b>
<b>Type</b>	String

A generated MySQL user with privileges to access the MySQL server's metadata schema. This user's password is auto-generated and stored in an encrypted `keyring`. By default, the encryption key for this keyring is stored in a read protected `master key store` file, which is defined in the configuration file. Most commonly, this user and associated password are automatically generated during bootstrap. Related command line options are `--force-password-validation` and `--password-retries`. By default, the generated password passes the `STRONG` `validate_password` strength.



The password is entirely managed by Router and never exposed, and is stored in a local keyring system using the operating system's account that MySQL Router is running as. It can then be used by Router to connect to InnoDB cluster and retrieve current topology information. Sessions between Router and metadata server are encrypted with SSL by default.

Where the generated keyring files are stored depends on how bootstrap is configured. For self-contained installations (when `--directory` is used), it is stored under `run/` in the self-contained directory. For system-wide installations, it is stored in the system-wide runtime state directory, and that path is platform specific. For additional information, see [master\\_key\\_path](#) and [keyring\\_path](#)

This user is assigned (and requires) the following privileges:

```
Privileges needed by the Router account:

On Metadata Server:

    SELECT ON mysql_innodb_cluster_metadata.*

On Target Replica Sets:

    SELECT ON performance_schema.replication_group_members
    SELECT ON performance_schema.replication_group_member_stats
```

The generated username follows this pattern: `mysql_router_[0-9]{1,6}_[0-9a-z]{12}`, where `[0-9]{1,6}` is the numeric router id and `[0-9a-z]{12}` is 12 random lowercase alphanumeric characters. The router id is reused if already present in `mysqlrouter.conf` and its length can not exceed 6 digits.



**Note**

This user is different from the `user` definition defined in the `[DEFAULT]` section, which is a system user.

- `metadata_cluster`

Property	Value
Type	String

Name of the InnoDB cluster.



**Note**

SQL query to list the MySQL InnoDB cluster names: `SELECT * FROM mysql_innodb_cluster_metadata.clusters;`

- `ttl`

Property	Value
Type ( $\geq$ 8.0.12)	Numeric
Type ( $\leq$ 8.0.11)	Integer
Default Value ( $\geq$ 8.0.12)	0.5
Default Value ( $\geq$ 8.0.4, $\leq$ 8.0.11)	5
Default Value ( $\leq$ 8.0.3)	300
Minimum Value	0
Maximum Value ( $\geq$ 8.0.12)	3600

Property	Value
Maximum Value (<= 8.0.11)	4294967295

Time to live (in seconds) of information in the metadata cache.

Accepts either an integer or a floating point value. The granularity is limited to milliseconds, where 0.001 equates to one millisecond. Precision is truncated to the supported range; for example *ttl=0.0119* is treated as 11 milliseconds. The value 0 means that the metadata cache module queries the metadata continuously in a tight loop.

The only supported decimal separator is '.' (a period) regardless of locale, and scientific notation, such as *ttl=1.6E-2*, is supported.

Floating point support was added in MySQL Router 8.0.12.

- [level](#)

Property	Value
Type	String
Default Value	INFO
Valid Values	INFO DEBUG WARNING ERROR FATAL

Use the *logger* plugin to log notices, errors, and debugging information. The available log levels are *INFO* (default), *DEBUG*, *WARNING*, *ERROR*, and *FATAL*. These values are case-insensitive.

The *INFO* level displays all informational messages, warnings, and error messages. The *DEBUG* level displays additional diagnostic information from the Router code, including successful routes.

```
[logger]
level = DEBUG
```

Output behavior depends on the [logging\\_folder](#) option. Setting [logging\\_folder](#) to a folder saves a log file named `mysqlrouter.log` to that folder. Setting [logging\\_folder](#) to an empty value, or not setting it, outputs the log to the console. It is set in the *[DEFAULT]* section.

As of MySQL Router 8.0.4, bootstrapping accepts a configuration file using `--config` and utilizes the logger level definition.

### 4.3.3 Configuration File Example

Here is a basic connection routing example to a MySQL InnoDB cluster named `mycluster`. Both classic and X protocols are enabled, it uses TCP/IP connections instead of Unix domain sockets, and it was generated using `--bootstrap` as a standalone configuration with `--directory` set to `/opt/routers/myrouter`.

In this example, read-write (primary) traffic is sent to port 6446 (classic) or 64460 (x), and read-only (secondaries) are accessed using port 6447 (classic) or 64470 (x).

The routing section keys (such as `mycluster_default_rw`) are optional, but using these descriptive section keys is helpful for debugging, and also allows multiple configuration sections for the same plugin.

The `destinations` option references `metadata-cache` to utilize InnoDB cluster's metadata cache that dynamically configures host information. Alternatively, `destinations` could be a comma-separated list of hosts to accommodate basic connection routing without InnoDB cluster.

```
# File automatically generated during MySQL Router bootstrap
[DEFAULT]
logging_folder=/opt/routers/myrouter/log
runtime_folder=/opt/routers/myrouter/run
data_folder=/opt/routers/myrouter/data
keyring_path=/opt/routers/router/data/keyring
master_key_path=/opt/routers/myrouter/mysqlrouter.key
connect_timeout=30
read_timeout=30

[logger]
level = INFO

[metadata_cache:mycluster]
router_id=5
bootstrap_server_addresses=mysql://localhost:3310,mysql://localhost:3320,mysql://localhost:3330
user=mysql_router5_6owf3spqlc6n
metadata_cluster=mycluster
ttl=5

[routing:mycluster_default_rw]
bind_address=0.0.0.0
bind_port=6446
destinations=metadata-cache://mycluster/default?role=PRIMARY
routing_strategy=round-robin
protocol=classic

[routing:mycluster_default_ro]
bind_address=0.0.0.0
bind_port=6447
destinations=metadata-cache://mycluster/default?role=SECONDARY
routing_strategy=round-robin
protocol=classic

[routing:mycluster_default_x_rw]
bind_address=0.0.0.0
bind_port=64460
destinations=metadata-cache://mycluster/default?role=PRIMARY
routing_strategy=round-robin
protocol=x

[routing:mycluster_default_x_ro]
bind_address=0.0.0.0
bind_port=64470
destinations=metadata-cache://mycluster/default?role=SECONDARY
routing_strategy=round-robin
protocol=x
```



---

# Chapter 5 MySQL Router Application

## Table of Contents

5.1 Starting MySQL Router .....	63
5.2 Using the Logging Feature .....	64

The MySQL Router is an executable that typically runs on the same machine as the application that uses it. This chapter describes the application including available options, how to start the application, and how to use the logging feature.

There are a number of options available for controlling the application when executing `mysqlrouter`. See the `mysqlrouter` documentation for information about the command-line options.

## 5.1 Starting MySQL Router

MySQL Router requires a configuration file. Although Router searches a predetermined list of default paths for the configuration file, it is common to start Router by passing in a configuration file with the `--config` option.

The process of configuring MySQL Router to automatically start when the host reboots is similar to the steps needed for MySQL server, which is described at [Starting and Stopping MySQL Automatically](#).

For example, when using `systemd`:

```
shell> sudo systemctl start mysqlrouter.service
shell> sudo systemctl enable mysqlrouter.service
```

## Example Log Output

Starting MySQL Router generates several log entries, for example when connecting to a sandboxed InnoDB cluster:

```
shell> mysqlrouter --config=/path/to/file/my_router.conf
^C

shell> less /path/to/log/mysqlrouter.log
2017-04-07 16:30:49 INFO [0x7000022fc000] [routing:devCluster_default_ro] started: listening on 0.0.
2017-04-07 16:30:49 INFO [0x70000237f000] [routing:devCluster_default_rw] started: listening on 0.0.
2017-04-07 16:30:49 INFO [0x700002402000] [routing:devCluster_default_x_ro] started: listening on 0.
2017-04-07 16:30:49 INFO [0x700002485000] [routing:devCluster_default_x_rw] started: listening on 0.
2017-04-07 16:30:49 INFO [0x700002279000] Starting Metadata Cache
2017-04-07 16:30:49 INFO [0x700002279000] Connections using ssl_mode 'PREFERRED'
2017-04-07 16:30:49 INFO [0x700002279000] Connected with metadata server running on 127.0.0.1:3310
2017-04-07 16:30:49 INFO [0x700002279000] Changes detected in cluster 'devCluster' after metadata re
2017-04-07 16:30:49 INFO [0x700002279000] Metadata for cluster 'devCluster' has 1 replicaset:
2017-04-07 16:30:49 INFO [0x700002279000] 'default' (3 members, single-master)
2017-04-07 16:30:49 INFO [0x700002279000] localhost:3310 / 33100 - role=HA mode=RW
2017-04-07 16:30:49 INFO [0x700002279000] localhost:3320 / 33200 - role=HA mode=RO
2017-04-07 16:30:49 INFO [0x700002279000] localhost:3330 / 33300 - role=HA mode=RO
2017-04-07 16:30:49 INFO [0x700002714000] Connected with metadata server running on 127.0.0.1:3310
```

The log shows that MySQL Router is listening on four ports, lists the active routing strategies by name, InnoDB cluster information, and more.

For example, the first line lists the active routing strategy named `routing:devCluster_default_ro`, is listening on port 6447, and its mode is `read-only`. The corresponding section in the MySQL Router configuration file looks similar to:

```
[routing:devCluster_default_ro]
```

```
bind_address=0.0.0.0
bind_port=6447
destinations=metadata-cache://devCluster/default?role=SECONDARY
mode=read-only
protocol=classic
```

See how the name, port, and mode were taken directly from the configuration file. In this way, you can quickly determine which routing strategies are active. This could be particularly useful if running several instances of MySQL Router, or if multiple configuration files are loaded.

On Windows, MySQL Router can install, remove, or start the service. By default, the service name is *MySQLRouter*. For additional information, see the `--service` and related command line options for Windows services.

## Example Start and Stop Scripts

Bootstrapping MySQL Router with the `--directory` option generates bash scripts to start and stop MySQL Router, which look similar to the following:

```
// *** start.sh ***** //

#!/bin/bash
basedir=/opt/myrouter
ROUTER_PID=$basedir/mysqlrouter.pid /usr/bin/mysqlrouter -c $basedir/mysqlrouter.conf &
disown %-

// *** stop.sh ***** //

if [ -f /opt/myrouter/mysqlrouter.pid ]; then
    kill -HUP `cat /opt/myrouter/mysqlrouter.pid`
    rm -f /opt/myrouter/mysqlrouter.pid
fi
```

## 5.2 Using the Logging Feature

The logging feature can be handy for developing and testing your application and deployment of the MySQL Router. To use logging, enable the logging `level` option in the configuration file under the section named `[logger]`. For example:

```
[logger]
level = INFO
```

Set the log file's location with the `logging_folder` option, defined as a directory path under the `[DEFAULT]` section in the configuration file. The logging file is named `mysqlrouter.log`. For example:

```
[DEFAULT]
# Logs are sent to /path/to/folder/mysqlrouter.log
logging_folder = /path/to/folder

[logger]
level = DEBUG
```

Setting `logging_folder` to an empty string sends logs to the console (stdout).

Two common logging levels are `INFO` (default) and `DEBUG`:

- `INFO`: includes informational messages like those shown above, and is the default mode
- `DEBUG`: includes messages generated inside Router's source code for use in diagnostics. The `DEBUG` mode presents verbose information concerning the inner workings of Router. While it may not be

of interest to the application, use of the [DEBUG](#) mode may be helpful if you encounter a problem or when Router is not behaving as you expect.

The following example shows what the messages look like for the [DEBUG](#) logging level; compare the [INFO](#) and [DEBUG](#) messages:

```
2017-04-07 18:25:56 INFO      [0x700009673000] Connections using ssl_mode 'PREFERRED'
2017-04-07 18:25:56 INFO      [0x700009673000] Connected with metadata server running on 127.0.0.1:3310
2017-04-07 18:25:56 DEBUG     [0x700009673000] Updating metadata information for cluster 'devCluster'
2017-04-07 18:25:56 DEBUG     [0x700009673000] Updating replicaset status from GR for 'default'
2017-04-07 18:25:56 DEBUG     [0x700009673000] Replicaset 'default' has 3 members in metadata, 3 in statu
2017-04-07 18:25:56 DEBUG     [0x700009673000] End updating replicaset for 'default'
2017-04-07 18:25:56 INFO      [0x700009673000] Changes detected in cluster 'devCluster' after metadata re
2017-04-07 18:25:56 INFO      [0x700009673000] Metadata for cluster 'devCluster' has 1 replicasets:
```





---

## Appendix A MySQL Router Frequently Asked Questions

A.1 Where do I install MySQL Router? .....	67
A.2 Can I run more than one instance of the router application? .....	67
A.3 How do I make the router application highly available? .....	67
A.4 Does the router inspect packets? .....	67
A.5 Does the router impact performance? .....	67
A.6 Please explain the different MySQL Router versions, especially why Router went from 2.1.4 to 8.0.3. ....	67
A.7 Can I bind the router to multiple IP addresses? .....	67
A.8 What is the difference between the different scheduling modes and strategies? .....	68
A.9 How many concurrent connections does each MySQL Router instance support? .....	68

### A.1. Where do I install MySQL Router?

For best performance, MySQL Router is typically installed on the same host as the application that uses it. Doing so can decrease network latency, allow a local unix domain socket connection to the application instead of TCP/IP, and typically application server's are easiest to scale. But, this is not a requirement as Router can be installed on any host, even its own.

Note: Unix domain sockets can function with applications connecting to MySQL Router, but not for MySQL Router connecting to a MySQL Server.

### A.2. Can I run more than one instance of the router application?

Yes, see also the `--directory` bootstrap option.

### A.3. How do I make the router application highly available?

Use MySQL Router as part of InnoDB cluster. For additional details, see [InnoDB Cluster](#).

### A.4. Does the router inspect packets?

No.

### A.5. Does the router impact performance?

Whenever you introduce a component in a communication stream there will be a certain amount of overhead incurred and is affected heavily by workload. Fortunately, performance testing on the current release has shown approximately 1% within the same speed as a direct connection for simple redirect connection routing.

### A.6. Please explain the different MySQL Router versions, especially why Router went from 2.1.4 to 8.0.3.

MySQL Router 2.0 was the initial version and is meant for MySQL Fabric users. It has since been deprecated and is no longer supported.

MySQL Router 2.1 was introduced to support MySQL InnoDB cluster, and it also added new features such as bootstrapping.

MySQL Router 8.0 expands on MySQL Router 2.1 but with a version number that aligns with MySQL Server. In other words, Router 2.1.5 was released as Router 8.0.3 (along with MySQL Server 8.0.3), and the 2.1.x branch was replaced by 8.0.x. The two branches are fully compatible.

### A.7. Can I bind the router to multiple IP addresses?

No, the `bind_address` option in the configuration file accepts only one address. However, it is possible to use `bind_address = 0.0.0.0` to bind to all ports on the localhost.

---

**A.8.** What is the difference between the different scheduling modes and strategies?

Before version 8.0, the `mode` option determined the scheduling strategy. Setting `mode=read-write` means Router uses the first destination host until it fails and then moves to the next until all hosts were attempted and failed. Setting `mode=read-only` cycles through the list of host destinations in a circular (round-robin) manner retrying servers that may have failed previously.

Router 8.0 introduced the `routing_strategy` option as a replacement to the now deprecated `mode` option. It offers the `first-available`, `next-available`, `round-robin` and `round-robin-with-fallback` strategies. See the `routing_strategy` documentation for additional details.

The `next-available` routing strategy is identical to the `read-write` mode's schedule, and the `round-robin` routing strategy is identical to the `read-only` mode's schedule.

**A.9.** How many concurrent connections does each MySQL Router instance support?

Over 5000 as of MySQL Router 2.1.5 and 8.0.4, depending on the operating system's `poll()` limits, and just over 500 in earlier versions due to their internal use of `select()` instead of `poll()`.